

TICTOC Working Group
INTERNET DRAFT
Intended status: Standards Track
Expires: January 30, 2013

Vinay Shankarkumar
Laurent Montini
Cisco Systems

Tim Frost
Greg Dowd
Symmetricom

July 30, 2012

Precision Time Protocol Version 2 (PTPv2)
Management Information Base
draft-ietf-tictoc-ntp-mib-03.txt

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at
<http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at
<http://www.ietf.org/shadow.html>

This Internet-Draft will expire on January 30, 2013.

Copyright Notice

Copyright (c) 2012 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents

Shankarkumar et al. Expires January 30, 2013

[Page 1]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt

July 30, 2012

carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must

include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Abstract

This memo defines a portion of the Management Information Base (MIB) for use with network management protocols in TCP/IP-based internets. In particular, it defines objects for managing networks using Precision Time Protocol.

This memo specifies a MIB module in a manner that is both compliant to the SNMPv2 SMI, and semantically identical to the peer SNMPv1 definitions.

Table of Contents

1. Introduction.....	2
1.1. Relationship to other Profiles and MIBs.....	3
1.2. Change Log.....	3
2. The SNMP Management Framework.....	4
3. Overview.....	5
4. IETF PTP MIB Definition.....	5
5. Security Considerations.....	61
6. IANA Considerations.....	61
7. References.....	61
7.1. Normative References.....	61
7.2. Informative References.....	61
8. Acknowledgements.....	63
9. Author's Addresses.....	64
10. ANNEX A: Extended Fields Addendum.....	65

1. Introduction

This memo defines a portion of the Management Information Base (MIB) for use with network management protocols in the Internet Community. In particular, it describes managed objects used for managing PTP devices including the ordinary clock, transparent clock, boundary clocks.

This MIB is restricted to reading standard PTP data elements, as described in [IEEE 1588-2008]. It is envisioned this MIB will complement other managed objects to be defined to monitor, measure the performance of the PTP devices and telecom clocks. Those objects are considered out of scope for the current draft.

Similarly, this MIB is read-only and not intended to provide the ability to configure PTP clocks. Since PTP clocks are often embedded in other network elements such as routers, switches and gateways, this ability is generally provided via the configuration interface for the network element.

1.1. Relationship to other Profiles and MIBs

This MIB is intended to be used with the default PTP profile described in [IEEE 1588-2008], and the Telecom Profile described in [G.8265.1], when running over the IP network layer. As stated above, it is envisioned this MIB will complement other managed objects to be defined to monitor, measure the performance of the PTP devices and telecom clocks.

Some other PTP profiles have their own MIBs defined as part of the profile, and this MIB is not intended to replace those MIBs.

1.2. Change Log

This section tracks changes made to the revisions of the Internet Drafts of this document. It will be **deleted** when the document is published as an RFC. This section tracks changes made to the revisions of the Internet Drafts of this document. It will be **deleted** when the document is published as an RFC.

draft-vinay-tictoc-ntp-mib

-00 Mar 11 Initial version; showed structure of MIB

draft-ietf-tictoc-ntp-mib

- 00 Jul 11 First full, syntactically correct and compileable MIB
- 01 Jan 12 Revised following comments from Bert Wijnen:
 - revised introduction to clarify the scope, and the relationship to other MIBs and profiles
 - changed name to "ptpbases"
 - corrected some data types
 - corrected references and typos
- 02 Jul 12 Revised following comment at IETF83:
 - changed "ptpbasesClockPortRunningIPversion" to the more generic "ptpbasesClockPortRunningTransport", covering all transport types defined in [IEEE 1588-2008] (i.e. IPv4, IPv6, Ethernet, DeviceNet and ControlNet).
 - changed addresses associated with transports from "InetAddress" (for the IP transport) to a string, to allow for the different transport types.
- 03 Jul 31 Revised following comments at IETF83 and from Andy Bierman:

Shankarkumar et al. Expires January 30, 2013

[Page 3]

Internet-Draft

draft-ietf-tictoc-ntp-mib-03.txt

July 30, 2012

- corrected minor compiling errors and typos from -01
- corrected breaking compiling error from -02
- moved the OBJECT-GROUPS and MODULE-COMPLIANCES to the end
- edited description clauses of MIBCompliances 1,2,3 & 4
- renamed ptpbasesMIBCompliances1 to 4:
 - ptpbasesMIBCompliancesSystemInfo
 - ptpbasesMIBCompliancesClockInfo

- ptpbseMIBCompliancesClockPortInfo
- ptpbseMIBCompliancesTransparentClockInfo
- added Annex with the extended structures introduced in -01
- edited minor corrections from -02

2. The SNMP Management Framework

The SNMP Management Framework presently consists of five major components:

1. An overall architecture, described in STD62, [RFC 3411].
2. Mechanisms for describing and naming objects and events for the purpose of management. The first version of this Structure of Management Information (SMI) is called SMIv1 and described in STD 16: [RFC 1155], [RFC 1212] and [RFC 1215]. The second version, called SMIv2, is described in STD 58: [RFC 2578], [RFC 2579] and [RFC 2580].
3. Message protocols for transferring management information. The first version of the SNMP message protocol is called SNMPv1 and described in STD 15 [RFC 1157]. A second version of the SNMP message protocol, which is not an Internet standards track protocol, is called SNMPv2c and described in [RFC 1901] and [RFC 1906]. The third version of the message protocol is called SNMPv3 and described in STD62: [RFC 3417], [RFC 3412] and [RFC 3414].
4. Protocol operations for accessing management information. The first set of protocol operations and associated PDU formats is described in STD 15 [RFC 1157]. A second set of protocol operations and associated PDU formats is described in STD 62 [RFC 3416].
5. A set of fundamental applications described in STD 62 [RFC 3413] and the view-based access control mechanism described in STD 62 [RFC 3415].

Managed objects are accessed via a virtual information store, termed the Management Information Base or MIB. Objects in the MIB are defined using the mechanisms defined in the SMI.

This memo specifies a MIB module that is compliant to the SMIv2. A MIB conforming to the SMIv1 can be produced through the appropriate translations. The resulting translated MIB must be semantically equivalent, except where objects or events are omitted because no translation is possible (e.g., use of Counter64). Some machine readable information in SMIv2 will be converted into textual descriptions in SMIv1 during the translation process. However, this

loss of machine readable information is not considered to change the semantics of the MIB.

3. Overview

The objects defined in this MIB are to be used when describing the Precision Time Protocol (PTPv2).

4. IETF PTP MIB Definition

PTPBASE-MIB DEFINITIONS ::= BEGIN

IMPORTS

```
MODULE-IDENTITY,  
OBJECT-TYPE,  
Integer32,  
Gauge32,  
Unsigned32,  
Counter32,  
Counter64,  
mib-2  
    FROM SNMPv2-SMI  
OBJECT-GROUP,  
MODULE-COMPLIANCE  
    FROM SNMPv2-CONF  
TEXTUAL-CONVENTION,  
TruthValue,  
DisplayString  
    FROM SNMPv2-TC  
InterfaceIndexOrZero  
    FROM IF-MIB;
```

ptpbaseMIB MODULE-IDENTITY

```
LAST-UPDATED      "201207230000Z"  
ORGANIZATION      "TICTOC Working Group"  
CONTACT-INFO  
    "WG Email: tictoc@ietf.org
```

Vinay Shankarkumar

Shankarkumar et al. Expires January 30, 2013

[Page 5]

Internet-Draft draft-ietf-tictoc-ptp-mib-03.txt

July 30, 2012

Cisco Systems,
Email: vinays@cisco.com

Laurent Montini,
Cisco Systems,
Email: lmontini@cisco.com

Tim Frost,
Symmetricom Inc.,
Email: tfrost@symmetricom.com

Greg Dowd,

Symmetricon Inc.,
Email: gdowd@symmetricon.com"

DESCRIPTION

"The MIB module for PTP version 2 (IEEE Std. 1588(TM)-2008)

Overview of PTP version 2 (IEEE Std. 1588(TM)-2008)

[IEEE 1588-2008] defines a protocol enabling precise synchronization of clocks in measurement and control systems implemented with packet-based networks, the Precision Time Protocol Version 2 (PTPv2). This MIB does not address the earlier version IEEE Std. 1588(TM)-2002 (PTPv1). The protocol is applicable to network elements communicating using IP. The protocol enables heterogeneous systems that include clocks of various inherent precision, resolution, and stability to synchronize to a grandmaster clock.

The protocol supports system-wide synchronization accuracy in the sub-microsecond range with minimal network and local clock computing resources. [IEEE 1588-2008] uses UDP/IP or Ethernet and can be adapted to other mappings. It includes formal mechanisms for message extensions, higher sampling rates, correction for asymmetry, a clock type to reduce error accumulation in large topologies, and specifications on how to incorporate the resulting additional data into the synchronization protocol. The [IEEE 1588-2008] defines conformance and management capability also.

MIB description

This MIB is to support the Precision Time Protocol version 2 (PTPv2, hereafter designated as PTP) features of network element system devices, when using the default PTP profile described in [IEEE 1588-2008], or the Telecom Profile described in [G.8265.1], when running over the IP network layer.

It is envisioned this MIB will complement other managed objects to be defined to monitor, measure the performance of the PTP devices and telecom clocks.

Shankarkumar et al. Expires January 30, 2013

[Page 6]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt

July 30, 2012

Some other PTP profiles have their own MIBs defined as part of the profile, and this MIB is not intended to replace those MIBs.

Acronyms:

ARB	Arbitrary Timescale
E2E	End-to-End
EUI	Extended Unique Identifier.
GPS	Global Positioning System
IANA	Internet Assigned Numbers Authority
IP	Internet Protocol
MAC	Media Access Control

	according to [IEEE 802.3-2008]
NIST	National Institute of Standards and Technology
NTP	Network Time Protocol (see IETF [RFC 5905])
OUI	Organizational Unique Identifier (allocated by the IEEE)
P2P	Peer-to-Peer
PTP	Precision Time Protocol
TAI	International Atomic Time
TC	Transparent Clock
UDP	User Datagram Protocol
UTC	Coordinated Universal Time

References:

[IEEE 1588-2008] IEEE Standard for A Precision Clock Synchronization Protocol for Networked Measurement and Control Systems, IEEE Std. 1588(TM)-2008, 24 July 2008.

[G.8265.1] Precision Time Protocol Telecom Profile for Frequency Synchronization, ITU-T Recommendation G.8265.1, October 2010.

As defined in [IEEE 1588-2008]:

Accuracy:

The mean of the time or frequency error between the clock under test and a perfect reference clock, over an ensemble of measurements. Stability is a measure of how the mean varies with respect to variables such as time, temperature, and so on, while the precision is a measure of the deviation of the error from the mean.

Atomic process:

A process is atomic if the values of all inputs to the process are not permitted to change until all of the results of the process are instantiated, and the outputs of the process are not visible to other processes until the processing of each output is complete.

Boundary clock:

A clock that has multiple Precision Time Protocol (PTP) ports in

Shankarkumar et al. Expires January 30, 2013

[Page 7]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt

July 30, 2012

a domain and maintains the timescale used in the domain. It may serve as the source of time, i.e., be a master clock, and may synchronize to another clock, i.e., be a slave clock.

Boundary node clock:

A clock that has multiple Precision Time Protocol(PTP) ports in a domain and maintains the timescale used in the domain. It differs from a boundary clock in that the clock roles can change.

Clock:

A node participating in the Precision Time Protocol (PTP) that

is capable of providing a measurement of the passage of time since a defined epoch.

Domain:

A logical grouping of clocks that synchronize to each other using the protocol, but that are not necessarily synchronized to clocks in another domain.

End-to-end transparent clock:

A transparent clock that supports the use of the end-to-end delay measurement mechanism between slave clocks and the master clock. Each node must measure the residence time of PTP event messages and accumulate it in Correction Field.

Epoch:

The origin of a timescale.

Event:

An abstraction of the mechanism by which signals or conditions are generated and represented.

Foreign master:

An ordinary or boundary clock sending Announce messages to another clock that is not the current master recognized by the other clock.

Grandmaster clock:

Within a domain, a clock that is the ultimate source of time for clock synchronization using the protocol.

Holdover:

A clock previously synchronized/synchronized to another clock (normally a primary reference or a master clock) but now free-running based on its own internal oscillator, whose frequency is being adjusted using data acquired while it had been synchronized/synchronized to the other clock. It is said to be in holdover or in the holdover mode, as long as it is within its accuracy requirements.

Link:

Shankarkumar et al. Expires January 30, 2013 [Page 8]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

A network segment between two Precision Time Protocol ports supporting the peer delay mechanism of this standard. The peer delay mechanism is designed to measure the propagation time over such a link.

Management node:

A device that configures and monitors clocks.

Master clock:

In the context of a single Precision Time Protocol communication path, a clock that is the source of time to which all other clocks on that path synchronize.

Message timestamp point:

A point within a Precision Time Protocol event message serving as a reference point in the message. A timestamp is defined by the instant a message timestamp point passes the reference plane of a clock.

Multicast communication:

A communication model in which each Precision Time Protocol message sent from any PTP port is capable of being received and processed by all PTP ports on the same PTP communication path.

Node:

A device that can issue or receive Precision Time Protocol communications on a network.

One-step clock:

A clock that provides time information using a single event message.

On-pass support:

Indicates that each node in the synchronization chain from master to slave can support IEEE-1588.

Ordinary clock:

A clock that has a single Precision Time Protocol port in a domain and maintains the timescale used in the domain. It may serve as a source of time, i.e., be a master clock, or may synchronize to another clock, i.e., be a slave clock.

Parent clock:

The master clock to which a clock is synchronized.

Peer-to-peer transparent clock:

A transparent clock that, in addition to providing Precision Time Protocol event transit time information, also provides corrections for the propagation delay of the link connected to the port receiving the PTP event message. In the presence of peer-to-peer transparent clocks, delay measurements between slave clocks and the master clock are performed using the

peer-to-peer delay measurement mechanism.

Phase change rate:

The observed rate of change in the measured time with respect to the reference time. The phase change rate is equal to the fractional frequency offset between the measured frequency and the reference frequency.

PortNumber:

An index identifying a specific Precision Time Protocol port on a PTP node.

Primary reference:

A source of time and or frequency that is traceable to international standards.

Profile:

The set of allowed Precision Time Protocol features applicable to a device.

Precision Time Protocol communication:

Information used in the operation of the protocol, transmitted in a PTP message over a PTP communication path.

Precision Time Protocol communication path:

The signaling path portion of a particular network enabling direct communication among ordinary and boundary clocks.

Precision Time Protocol node:

PTP ordinary, boundary, or transparent clock or a device that generates or parses PTP messages.

Precision Time Protocol port:

A logical access point of a clock for PTP communications to the communications network.

Recognized standard time source:

A recognized standard time source is a source external to Precision Time Protocol that provides time and/or frequency as appropriate that is traceable to the international standards laboratories maintaining clocks that form the basis for the International Atomic Time and Universal Coordinated Time timescales. Examples of these are GPS, NTP, and NIST timeservers.

Requestor:

The port implementing the peer-to-peer delay mechanism that initiates the mechanism by sending a Pdelay_Req message.

Responder:

The port responding to the receipt of a Pdelay_Req message as part of the operation of the peer-to-peer delay mechanism.

Synchronized clocks:

Two clocks are synchronized to a specified uncertainty if they have the same epoch and their measurements of the time of a single event at an arbitrary time differ by no more than that uncertainty.

Syntonized clocks:

Two clocks are syntonized if the duration of the second is the same on both, which means the time as measured by each advances at the same rate. They may or may not share the same epoch.

Timeout:

A mechanism for terminating requested activity that, at least from the requester's perspective, does not complete within the specified time.

Timescale:

A linear measure of time from an epoch.

Traceability:

A property of the result of a measurement or the value of a standard whereby it can be related to stated references, usually national or international standards, through an unbroken chain of comparisons all having stated uncertainties.

Translation device:

A boundary clock or, in some cases, a transparent clock that translates the protocol messages between regions implementing different transport and messaging protocols, between different versions of [IEEE 1588-2008], or different PTP profiles.

Transparent clock:

A device that measures the time taken for a Precision Time Protocol event message to transit the device and provides this information to clocks receiving this PTP event message.


Two-step clock:


A clock that provides time information using the combination of an event message and a subsequent general message.

The below table specifies the object formats of the various textual conventions used.

Data type mapping	Textual Convention	SYNTAX
5.3.2 TimeInterval	ClockTimeInterval	OCTET STRING(SIZE(1..255))
5.3.3 Timestamp	ClockTimestamp	OCTET STRING(SIZE(6))
5.3.4 ClockIdentity	ClockIdentity	OCTET STRING(SIZE(1..255))
5.3.5 PortIdentity	ClockPortNumber	INTEGER(1..65535)
5.3.7 ClockQuality	ClockQualityClassType	

Simple master-slave hierarchy, section 6.6.2.4 [IEEE 1588-2008]:

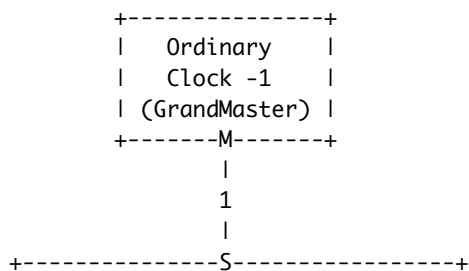

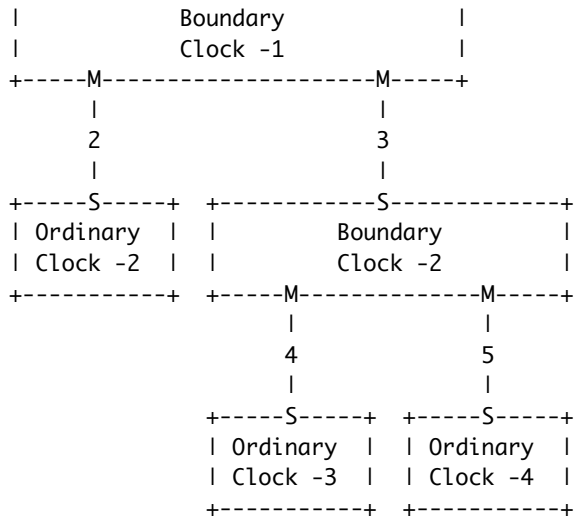


Grandmaster


Boundary Clock(0-N) Ordinary Clocks(0-N)
 Ordinary Clocks(0-N)

Relationship cardinality:

- PTP system 1 : N PTP Clocks
- PTP Clock 1 : 1 Domain
- PTP Clock 1 : N PTP Ports
- PTP Ports N : M Physical Ports (interface in IF-MIB)

Transparent clock diagram, section 6.7.1.3 of [IEEE 1588-2008]:

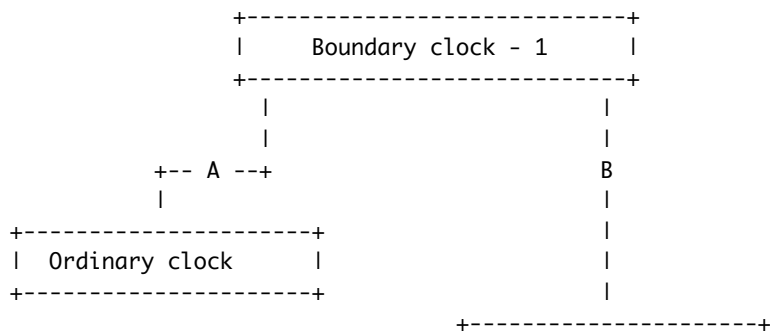

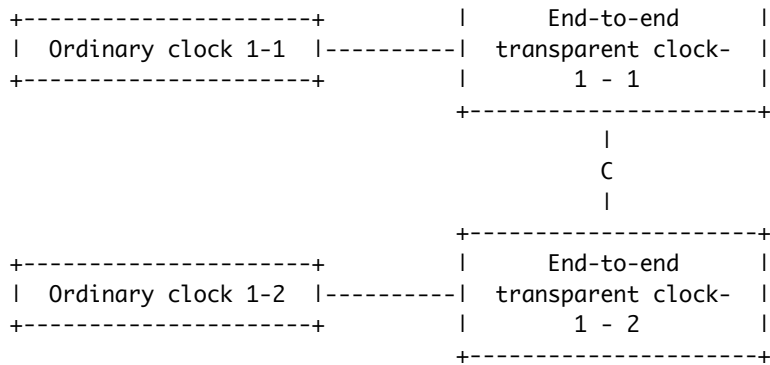

The MIB refers to the sections of [IEEE 1588-2008]."

-- revision log

::= { mib-2 XXX } -- XXX to be assigned by IANA

ClockDomainType ::= TEXTUAL-CONVENTION

DISPLAY-HINT "d"

STATUS current

DESCRIPTION

"The Domain is identified by an integer, the domainNumber, in the range of 0 to 255. An integer value that is used to assign each PTP device to a particular domain. The following values define the valid domains.

Value	Definition
0	Default domain
1	Alternate domain 1
2	Alternate domain 2
3	Alternate domain 3
4 - 127	User-defined domains
128 - 255	Reserved"

Shankarkumar et al. Expires January 30, 2013

[Page 13]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt

July 30, 2012

REFERENCE "Section 7.1 Domains, Table 2 of [IEEE 1588-2008]"

SYNTAX Unsigned32 (0..255)

ClockIdentity ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"The clock Identity is an 8-octet array and will be presented in the form of a character array. The value of the ClockIdentity should be taken from the IEEE EUI-64 individual assigned numbers as indicated in Section 7.5.2.2.2 of [IEEE 1588-2008]. The EUI-64 address is divided into the following fields:

OUI bytes (0-2)
Extension identifier bytes (3-7)

The clock identifier can be constructed from existing EUI-48 assignments and here is an abbreviated example extracted from section 7.5.2.2.2 [IEEE 1588-2008].

Company EUI-48 = 0xACDE4823456716
EUI-64 = ACDE48FFFE23456716

It is important to note the IEEE Registration Authority has deprecated the use of MAC-48 in any new design."

REFERENCE "Section 7.5.2.2.1 of [IEEE 1588-2008]"
SYNTAX OCTET STRING (SIZE (1..255))

ClockIntervalBase2 ::= TEXTUAL-CONVENTION
DISPLAY-HINT "d"
STATUS current
DESCRIPTION
"The interval included in message types Announce, Sync, Delay_Req, and Pdelay_Req as indicated in section 7.7.2.1 of [IEEE 1588-2008].

The mean time interval between successive messages shall be represented as the logarithm to the base 2 of this time interval measured in seconds on the local clock of the device sending the message. The values of these logarithmic attributes shall be selected from integers in the range -128 to 127 subject to further limits established in an applicable PTP profile."

REFERENCE "Section 7.7.2.1 General interval specification of [IEEE 1588-2008]"
SYNTAX Integer32 (-128..127)

ClockMechanismType ::= TEXTUAL-CONVENTION
STATUS current
DESCRIPTION

Shankarkumar et al. Expires January 30, 2013 [Page 14]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

"The clock type based on whether End to End or peer to peer mechanisms are used. The mechanism used to calculate the Mean Path Delay as indicated in Table 9 of [IEEE 1588-2008].

Delay mechanism	Value(hex)	Specification
E2E	01	The port is configured to use the delay request-response mechanism.
P2P	02	The port is configured to use the peer delay mechanism.
DISABLED	FE	The port does not implement the delay mechanism."

REFERENCE "Sections 8.2.5.4.4, 6.6.4, 7.4.2 of [IEEE 1588-2008]."
 SYNTAX INTEGER {
 e2e(1),
 p2p(2),
 disabled(254)
 }

ClockInstanceType ::= TEXTUAL-CONVENTION
 DISPLAY-HINT "d"
 STATUS current
 DESCRIPTION
 "The instance of the Clock of a given clock type in a given domain."
 SYNTAX Unsigned32 (0..255)

ClockPortNumber ::= TEXTUAL-CONVENTION
 DISPLAY-HINT "d"
 STATUS current
 DESCRIPTION
 "An index identifying a specific Precision Time Protocol (PTP) port on a PTP node."
 REFERENCE "Sections 7.5.2.3 and 5.3.5 of [IEEE 1588-2008]"
 SYNTAX Unsigned32 (0..65535)

ClockPortState ::= TEXTUAL-CONVENTION
 STATUS current
 DESCRIPTION
 "This is the value of the current state of the protocol engine associated with this port.

Port state	Value	Description
initializing	1	In this state a port initializes its data sets, hardware, and communication facilities.
faulty	2	The fault state of the protocol.
disabled	3	The port shall not place any messages on its communication path.
listening	4	The port is waiting for the

Shankarkumar et al. Expires January 30, 2013 [Page 15]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

preMaster	5	announceReceiptTimeout to expire or to receive an Announce message from a master. The port shall behave in all respects as though it were in the MASTER state except that it shall not place any messages on its communication path except for Pdelay_Req, Pdelay_Resp, Pdelay_Resp_Follow_Up, signaling, or management messages.
master	6	The port is behaving as a master port.
passive	7	The port shall not place any messages on its communication path except for

		Pdelay_Req, Pdelay_Resp, Pdelay_Resp_Follow_Up, or signaling messages, or management messages that are a required response to another management message
uncalibrated	8	The local port is preparing to synchronize to the master port.
slave	9	The port is synchronizing to the selected master port."

REFERENCE "Section 8.2.5.3.1 portState and 9.2.5 of [IEEE 1588-2008]"

SYNTAX INTEGER {
initializing(1),
faulty(2),
disabled(3),
listening(4),
preMaster(5),
master(6),
passive(7),
uncalibrated(8),
slave(9)
}

ClockProfileType ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"Clock Profile used. A profile is the set of allowed Precision Time Protocol (PTP) features applicable to a device."

REFERENCE "Section 3.1.30 and 19.3 PTP profiles of [IEEE 1588-2008]"

SYNTAX INTEGER {
default(1),
telecom(2),
vendorspecific(3)
}

ClockQualityAccuracyType ::= TEXTUAL-CONVENTION

Shankarkumar et al. Expires January 30, 2013 [Page 16]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

STATUS current

DESCRIPTION

"The ClockQuality as specified in section 5.3.7, 7.6.2.5 and Table 6 of [IEEE 1588-2008].

The following values are not represented in the enumerated values.

0x01-0x1F Reserved
0x32-0x7F Reserved

It is important to note that section 7.1.1 RFC2578 allows for gaps and enumerate values to start with zero when indicated by

the protocol."

```
REFERENCE      "Section 5.3.7, 7.6.2.5 and Table 6 of
                [IEEE 1588-2008]"
SYNTAX         INTEGER {
                reserved00(1),      -- 0
                nanoSecond25(32),   -- 0x20
                nanoSecond100(33),  -- 0x21
                nanoSecond250(34),  -- 0x22
                microSec1(35),      -- 0x23
                microSec2dot5(36),  -- 0x24
                microSec10(37),     -- 0x25
                microSec25(38),     -- 0x26
                microSec100(39),    -- 0x27
                microSec250(40),    -- 0x28
                milliSec1(41),     -- 0x29
                milliSec2dot5(42),  -- 0x2A
                milliSec10(43),    -- 0x2B
                milliSec25(44),    -- 0x2C
                milliSec100(45),   -- 0x2D
                milliSec250(46),   -- 0x2E
                second1(47),       -- 0x2F
                second10(48),      -- 0x30
                secondGreater10(49), -- 0x31
                unknown(254),      -- 0xFE
                reserved255(255)   -- 0xFF
                }
```

ClockQualityClassType ::= TEXTUAL-CONVENTION

```
DISPLAY-HINT  "d"
STATUS        current
DESCRIPTION
```

"The ClockQuality as specified in section 5.3.7, 7.6.2.4 and Table 5 of [IEEE 1588-2008].

Value	Description
0	Reserved to enable compatibility with future versions.

Shankarkumar et al. Expires January 30, 2013 [Page 17]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

- 1-5 Reserved
- 6 Shall designate a clock that is synchronized to a primary reference time source. The timescale distributed shall be PTP. A clockClass 6 clock shall not be a slave to another clock in the domain.
- 7 Shall designate a clock that has previously been designated as clockClass 6 but that has lost the ability to synchronize to a primary reference time source and is in holdover mode and within holdover specifications. The timescale distributed shall be PTP. A clockClass 7 clock shall not be a slave to

- another clock in the domain.
- 8 Reserved.
 - 9-10 Reserved to enable compatibility with future versions.
 - 11-12 Reserved.
 - 13 Shall designate a clock that is synchronized to an application-specific source of time. The timescale distributed shall be ARB. A clockClass 13 clock shall not be a slave to another clock in the domain.
 - 14 Shall designate a clock that has previously been designated as clockClass 13 but that has lost the ability to synchronize to an application-specific source of time and is in holdover mode and within holdover specifications. The timescale distributed shall be ARB. A clockClass 14 clock shall not be a slave to another clock in the domain.
 - 15-51 Reserved.
 - 52 Degradation alternative A for a clock of clockClass 7 that is not within holdover specification. A clock of clockClass 52 shall not be a slave to another clock in the domain.
 - 53-57 Reserved.
 - 58 Degradation alternative A for a clock of clockClass 14 that is not within holdover specification. A clock of clockClass 58 shall not be a slave to another clock in the domain.
 - 59-67 Reserved.
 - 68-122 For use by alternate PTP profiles.
 - 123-127 Reserved.
 - 128-132 Reserved.
 - 133-170 For use by alternate PTP profiles.
 - 171-186 Reserved.

 - 187 Degradation alternative B for a clock of clockClass 7 that is not within holdover specification. A clock of clockClass 187 may

- be a slave to another clock in the domain.
- 188-192 Reserved.
- 193 Degradation alternative B for a clock of clockClass 14 that is not within holdover specification. A clock of clockClass 193 may be a slave to another clock in the domain.
- 194-215 Reserved.
- 216-232 For use by alternate PTP profiles.
- 233-247 Reserved.
- 248 Default. This clockClass shall be used if none of the other clockClass definitions apply.
- 249-250 Reserved.
- 251 Reserved for version 1 compatibility; see Clause 18.

252-254 Reserved.
 255 Shall be the clockClass of a slave-only clock; see 9.2.2."

REFERENCE "Section 5.3.7, 7.6.2.4 and Table 5 of [IEEE 1588-2008]."
 SYNTAX Unsigned32 (0..255)

ClockRoleType ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"The Clock Role. The protocol generates a Master Slave relationship among the clocks in the system.

Clock Role	Value	Description
Master clock	1	A clock that is the source of time to which all other clocks on that path synchronize.
Slave clock	2	A clock which synchronizes to another clock (master)."

SYNTAX INTEGER {
 master(1),
 slave(2)
 }

ClockStateType ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"The clock state returned by PTP engine.

Clock State	Value	Description
Freerun state	1	Applies to a slave device that is not locked to a master. This is the initial state a slave starts out with when it is not getting any PTP packets from the master or because of some other input

Shankarkumar et al. Expires January 30, 2013 [Page 19]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

error (erroneous packets, etc).

Holdover state	2	In this state the slave device is locked to a master but communication with the master is lost or the timestamps in the ptp packets are incorrect. But since the slave was locked to the master, it can run with the same accuracy for sometime. The slave can continue to operate in this state for some time. If communication with the master is not restored for a while, the device is moved to the
----------------	---	--

FREERUN state.

- | | | |
|---------------------|---|---|
| Acquiring state | 3 | The slave device is receiving packets from a master and is trying to acquire a lock. |
| Freq_locked state | 4 | Slave device is locked to the Master with respect to frequency, but not phase aligned |
| Phase_aligned state | 5 | Locked to the master with respect to frequency and phase." |

```
SYNTAX      INTEGER {
                freerun(1),
                holdover(2),
                acquiring(3),
                frequencyLocked(4),
                phaseAligned(5)
            }
```

ClockTimeSourceType ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"The ClockQuality as specified in section 5.3.7, 7.6.2.6 and Table 7 of [IEEE 1588-2008].

The following values are not represented in the enumerated values.

0xF0-0xFE For use by alternate PTP profiles

0xFF Reserved

It is important to note that section 7.1.1 RFC2578 allows for gaps and enumerate values to start with zero when indicated by the protocol."

REFERENCE "Section 5.3.7, 7.6.2.6 and Table 7 of [IEEE 1588-2008]."

```
SYNTAX      INTEGER {
```

Shankarkumar et al. Expires January 30, 2013 [Page 20]

Internet-Draft draft-ietf-tictoc-ptp-mib-03.txt July 30, 2012

```
                atomicClock(16), -- 0x10
                gps(32), -- 0x20
                terrestrialRadio(48), -- 0x22
                ptp(64), -- 0x40
                ntp(80), -- 0x50
                handSet(96), -- 0x60
                other(144), -- 0x90
                internalOscillator(160) -- 0xA0
            }
```

ClockTimeInterval ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"This textual convention corresponds to the TimeInterval structure indicated in section 5.3.2 of [IEEE 1588-2008]. It will be presented in the form of a character array.

The TimeInterval type represents time intervals.

```
struct TimeInterval
{
    Integer64 scaledNanoseconds;
};
```

The scaledNanoseconds member is the time interval expressed in units of nanoseconds and multiplied by 2**16.

Positive or negative time intervals outside the maximum range of this data type shall be encoded as the largest positive and negative values of the data type, respectively.

For example, 2.5 ns is expressed as 0000 0000 0002 8000 in Base16."

REFERENCE

"Section 5.3.2 and setion 7.7.2.1 Timer interval specification of [IEEE 1588-2008]"

SYNTAX OCTET STRING (SIZE (1..255))

ClockTxModeType ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"Transmission mode.

unicast. Using unicast communication channel.

multicast. Using Multicast communication channel.

multicast-mix. Using multicast-unicast communication channel"

SYNTAX INTEGER {
unicast(1),
multicast(2),

Shankarkumar et al. Expires January 30, 2013

[Page 21]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt

July 30, 2012

```
multicastmix(3)
}
```

ClockType ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"The clock types as defined in the MIB module description."

REFERENCE "Section 6.5.1 of [IEEE 1588-2008]."

SYNTAX INTEGER {
ordinaryClock(1),
boundaryClock(2),
transparentClock(3),

```
        boundaryNode(4)
    }
```

ClockPortTransportType ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"The Clock port transport type."

REFERENCE "Annex D (IPv4), Annex E (IPv6), Annex F (Ethernet),
Annex G (DeviceNET), Annex H (ControlNET) and
Annex I (IEC61158) of [IEEE 1588-2008]"

SYNTAX INTEGER {
 ipversion4(1),
 ipversion6(2),
 ethernet(3),
 deviceNET(4),
 controlNET(5),
 iec61158(6)
}

ClockPortTransportTypeAddress ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"The Clock port transport protocol address used for this
communication between the clock nodes. This is a string
corresponding to the address type as specified by the
ClockPortTransportType.

This can be address of type IP version 4, IP version 6,
Ethernet, DeviceNET, ControlNET and IEC61158."

REFERENCE "Annex D (IPv4), Annex E (IPv6), Annex F (Ethernet),
Annex G (DeviceNET), Annex H (ControlNET) and
Annex I (IEC61158) of [IEEE 1588-2008]"

SYNTAX OCTET STRING (SIZE (1..255))

ptpbaseMIBClockInfo OBJECT IDENTIFIER

::= { ptpbaseMIBobjects 2 }

Shankarkumar et al. Expires January 30, 2013

[Page 22]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt

July 30, 2012

ptpbaseSystemTable OBJECT-TYPE

SYNTAX SEQUENCE OF PtpbaseSystemEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Table of count information about the PTP system for all
domains."

::= { ptpbaseMIBSystemInfo 1 }

ptpbaseSystemEntry OBJECT-TYPE

SYNTAX PtpbaseSystemEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in the table, containing count information about a single domain. New row entries are added when the PTP clock for this domain is configured, while the unconfiguration of the PTP clock removes it."

```
INDEX      {
            ptpDomainIndex,
            ptpInstanceIndex
          }
```

```
::= { ptpbaseSystemTable 1 }
```

```
PtpbaseSystemEntry ::= SEQUENCE {
    ptpDomainIndex      ClockDomainType,
    ptpInstanceIndex    ClockInstanceType,
    ptpDomainClockPortsTotal Gauge32
}
```

ptpDomainIndex OBJECT-TYPE

SYNTAX ClockDomainType

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This object specifies the domain number used to create logical group of PTP devices. The Clock Domain is a logical group of clocks and devices that synchronize with each other using the PTP protocol.

0	Default domain
1	Alternate domain 1
2	Alternate domain 2
3	Alternate domain 3
4 - 127	User-defined domains
128 - 255	Reserved"

```
::= { ptpbaseSystemEntry 1 }
```

ptpInstanceIndex OBJECT-TYPE

SYNTAX ClockInstanceType

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This object specifies the instance of the Clock for this domain."

```
::= { ptpbaseSystemEntry 2 }
```

ptpDomainClockPortsTotal OBJECT-TYPE

SYNTAX Gauge32

UNITS "ptp ports"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object specifies the total number of clock ports configured within a domain."

```
::= { ptpbaseSystemEntry 3 }
```

```
ptpbaseSystemDomainTable OBJECT-TYPE
```

```
SYNTAX SEQUENCE OF PtpbaseSystemDomainEntry
```

```
MAX-ACCESS not-accessible
```

```
STATUS current
```

```
DESCRIPTION
```

```
"Table of information about the PTP system for all clock modes  
-- ordinary, boundary or transparent."
```

```
::= { ptpbaseMIBSystemInfo 2 }
```

```
ptpbaseSystemDomainEntry OBJECT-TYPE
```

```
SYNTAX PtpbaseSystemDomainEntry
```

```
MAX-ACCESS not-accessible
```

```
STATUS current
```

```
DESCRIPTION
```

```
"An entry in the table, containing information about a single  
clock mode for the PTP system. A row entry gets added when PTP  
clocks are configured on the router."
```

```
INDEX { ptpbaseSystemDomainClockTypeIndex }
```

```
::= { ptpbaseSystemDomainTable 1 }
```

```
PtpbaseSystemDomainEntry ::= SEQUENCE {
```

```
    ptpbaseSystemDomainClockTypeIndex ClockType,
```

```
    ptpbaseSystemDomainTotals Unsigned32
```

```
}
```

```
ptpbaseSystemDomainClockTypeIndex OBJECT-TYPE
```

```
SYNTAX ClockType
```

```
MAX-ACCESS not-accessible
```

```
STATUS current
```

```
DESCRIPTION
```

```
"This object specifies the clock type as defined in the  
Textual convention description."
```

```
::= { ptpbaseSystemDomainEntry 1 }
```

```
ptpbaseSystemDomainTotals OBJECT-TYPE
```

Shankarkumar et al. Expires January 30, 2013

[Page 24]

Internet-Draft draft-ietf-tictoc-ptp-mib-03.txt

July 30, 2012

```
SYNTAX Unsigned32
```

```
UNITS "domains"
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"This object specifies the total number of PTP domains for this  
particular clock type configured in this node."
```

```
::= { ptpbaseSystemDomainEntry 2 }
```

```
ptpbaseSystemProfile OBJECT-TYPE
```

```
SYNTAX ClockProfileType
```


MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the PTP Profile implemented on the system."
REFERENCE "Section 19.3 PTP profiles of [IEEE 1588-2008]"
::= { ptpbaseMIBSystemInfo 3 }

ptpbaseClockCurrentDSTable OBJECT-TYPE
SYNTAX SEQUENCE OF PtpbaseClockCurrentDSEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
"Table of information about the PTP clock Current Datasets for all domains."
::= { ptpbaseMIBClockInfo 1 }

ptpbaseClockCurrentDSEntry OBJECT-TYPE
SYNTAX PtpbaseClockCurrentDSEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
"An entry in the table, containing information about a single PTP clock Current Datasets for a domain."
REFERENCE
"1588 Version 2.0 Section 8.2.2 currentDS data set member specifications of [IEEE 1588-2008]"
INDEX {
ptpbaseClockCurrentDSDomainIndex,
ptpbaseClockCurrentDSClockTypeIndex,
ptpbaseClockCurrentDSInstanceIndex
}
::= { ptpbaseClockCurrentDSTable 1 }

PtpbaseClockCurrentDSEntry ::= SEQUENCE {
ptpbaseClockCurrentDSDomainIndex ClockDomainType,
ptpbaseClockCurrentDSClockTypeIndex ClockType,
ptpbaseClockCurrentDSInstanceIndex ClockInstanceType,
ptpbaseClockCurrentDSStepsRemoved Unsigned32,

Shankarkumar et al. Expires January 30, 2013 [Page 25]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

ptpbaseClockCurrentDSOffsetFromMaster ClockTimeInterval,
ptpbaseClockCurrentDSMeanPathDelay ClockTimeInterval
}

ptpbaseClockCurrentDSDomainIndex OBJECT-TYPE
SYNTAX ClockDomainType
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
"This object specifies the domain number used to create logical group of PTP devices."
::= { ptpbaseClockCurrentDSEntry 1 }

```

ptpbasedClockCurrentDSClockTypeIndex OBJECT-TYPE
    SYNTAX          ClockType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the clock type as defined in the
        Textual convention description."
    ::= { ptpbasedClockCurrentDSEntry 2 }

ptpbasedClockCurrentDSInstanceIndex OBJECT-TYPE
    SYNTAX          ClockInstanceType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the instance of the clock for this clock
        type in the given domain."
    ::= { ptpbasedClockCurrentDSEntry 3 }

ptpbasedClockCurrentDSStepsRemoved OBJECT-TYPE
    SYNTAX          Unsigned32
    UNITS           "Steps"
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "The current clock dataset StepsRemoved value.

        This object specifies the distance measured by the number of
        Boundary clocks between the local clock and the Foreign master
        as indicated in the stepsRemoved field of Announce messages."
    REFERENCE      "1588 Version 2.0 Section 8.2.2.2 stepsRemoved"
    ::= { ptpbasedClockCurrentDSEntry 4 }

ptpbasedClockCurrentDSOffsetFromMaster OBJECT-TYPE
    SYNTAX          ClockTimeInterval
    UNITS           "Time Interval"
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the current clock dataset ClockOffset

value. The value of the computation of the offset in time
between a slave and a master clock."
    REFERENCE      "1588 Version 2.0 Section 8.2.2.3 of
                    [IEEE 1588-2008]"
    ::= { ptpbasedClockCurrentDSEntry 5 }

ptpbasedClockCurrentDSMeanPathDelay OBJECT-TYPE
    SYNTAX          ClockTimeInterval
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the current clock dataset
        MeanPathDelay value.

```

Shankarkumar et al. Expires January 30, 2013 [Page 26]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

The mean path delay between a pair of ports as measure by the delay request-response mechanism."
 REFERENCE "1588 Version 2.0 Section 8.2.2.4 mean path delay"
 ::= { ptpbaseClockCurrentDSEntry 6 }

ptpbaseClockParentDSTable OBJECT-TYPE

SYNTAX SEQUENCE OF PtpbaseClockParentDSEntry
 MAX-ACCESS not-accessible
 STATUS current
 DESCRIPTION
 "Table of information about the PTP clock Parent Datasets for all domains."
 ::= { ptpbaseMIBClockInfo 2 }

ptpbaseClockParentDSEntry OBJECT-TYPE

SYNTAX PtpbaseClockParentDSEntry
 MAX-ACCESS not-accessible
 STATUS current
 DESCRIPTION
 "An entry in the table, containing information about a single PTP clock Parent Datasets for a domain."
 REFERENCE
 "Section 8.2.3 parentDS data set member specifications of [IEEE 1588-2008]"
 INDEX {
 ptpbaseClockParentDSDomainIndex,
 ptpbaseClockParentDSClockTypeIndex,
 ptpbaseClockParentDSInstanceIndex
 }
 ::= { ptpbaseClockParentDSTable 1 }

PtpbaseClockParentDSEntry ::= SEQUENCE {
 ptpbaseClockParentDSDomainIndex ClockDomainType,
 ptpbaseClockParentDSClockTypeIndex ClockType,
 ptpbaseClockParentDSInstanceIndex ClockInstanceType,
 ptpbaseClockParentDSParentPortIdentity OCTET STRING,

Shankarkumar et al. Expires January 30, 2013 [Page 27]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

ptpbaseClockParentDSParentStats TruthValue,
 ptpbaseClockParentDSOffset ClockIntervalBase2,
 ptpbaseClockParentDSClockPhChRate Integer32,
 ptpbaseClockParentDSGMClockIdentity ClockIdentity,
 ptpbaseClockParentDSGMClockPriority1 Unsigned32,
 ptpbaseClockParentDSGMClockPriority2 Unsigned32,
 ptpbaseClockParentDSGMClockQualityClass ClockQualityClassType,
 ptpbaseClockParentDSGMClockQualityAccuracy ClockQualityAccuracyType,
 ptpbaseClockParentDSGMClockQualityOffset Unsigned32
 }

ptpbaseClockParentDSDomainIndex OBJECT-TYPE

SYNTAX ClockDomainType

MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
"This object specifies the domain number used to create logical
group of PTP devices."
::= { ptpbaseClockParentDSEntry 1 }

ptpbaseClockParentDSClockTypeIndex OBJECT-TYPE
SYNTAX ClockType
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
"This object specifies the clock type as defined in the
Textual convention description."
::= { ptpbaseClockParentDSEntry 2 }

ptpbaseClockParentDSInstanceIndex OBJECT-TYPE
SYNTAX ClockInstanceType
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
"This object specifies the instance of the clock for this clock
type in the given domain."
::= { ptpbaseClockParentDSEntry 3 }

ptpbaseClockParentDSParentPortIdentity OBJECT-TYPE
SYNTAX OCTET STRING(SIZE(1..256))
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the value of portIdentity of the port on
the master that issues the Sync messages used in synchronizing
this clock."
REFERENCE
"Section 8.2.3.2 parentDS.parentPortIdentity of
[IEEE 1588-2008]"
::= { ptpbaseClockParentDSEntry 4 }

ptpbaseClockParentDSParentStats OBJECT-TYPE

Shankarkumar et al. Expires January 30, 2013 [Page 28]

Internet-Draft draft-ietf-tictoc-ptp-mib-03.txt July 30, 2012

SYNTAX TruthValue
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the Parent Dataset ParentStats value.

This value indicates whether the values of ParentDSOffset
and ParentDSClockPhChRate have been measured and are valid.
A TRUE value shall indicate valid data."
REFERENCE "Section 8.2.3.3 parentDS.parentStats of
[IEEE 1588-2008]"
::= { ptpbaseClockParentDSEntry 5 }

```

ptpbaseClockParentDSOffset OBJECT-TYPE
    SYNTAX          ClockIntervalBase2 (-128..127)
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the Parent Dataset
        ParentOffsetScaledLogVariance value.

        This value is the variance of the parent clocks phase as
        measured by the local clock."
    REFERENCE
        "Section 8.2.3.4
        parentDS.observedParentOffsetScaledLogVariance
        [IEEE 1588-2008]"
    ::= { ptpbaseClockParentDSEntry 6 }

ptpbaseClockParentDSClockPhChRate OBJECT-TYPE
    SYNTAX          Integer32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the clock's parent dataset
        ParentClockPhaseChangeRate value.

        This value is an estimate of the parent clocks phase change
        rate as measured by the slave clock."
    REFERENCE
        "Section 8.2.3.5
        parentDS.observedParentClockPhaseChangeRate of
        [IEEE 1588-2008]"
    ::= { ptpbaseClockParentDSEntry 7 }

ptpbaseClockParentDSGMClockIdentity OBJECT-TYPE
    SYNTAX          ClockIdentity
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the parent dataset Grandmaster clock
        identity."

```

Shankarkumar et al. Expires January 30, 2013 [Page 29]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

```

REFERENCE
    "Section 8.2.3.6 parentDS.grandmasterIdentity of
    [IEEE 1588-2008]"
    ::= { ptpbaseClockParentDSEntry 8 }

```

```

ptpbaseClockParentDSGMClockPriority1 OBJECT-TYPE
    SYNTAX          Unsigned32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the parent dataset Grandmaster clock
        priority1."
    REFERENCE

```

```
    "Section 8.2.3.8 parentDS.grandmasterPriority1 of
      [IEEE 1588-2008]"
 ::= { ptpbaseClockParentDSEntry 9 }
```

ptpbaseClockParentDSGMClockPriority2 OBJECT-TYPE

```
SYNTAX      Unsigned32
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "This object specifies the parent dataset grandmaster clock
    priority2."
REFERENCE
    "Section 8.2.3.9 parentDS.grandmasterPriority2 of
    [IEEE 1588-2008]"
 ::= { ptpbaseClockParentDSEntry 10 }
```

ptpbaseClockParentDSGMClockQualityClass OBJECT-TYPE

```
SYNTAX      ClockQualityClassType (0..255)
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "This object specifies the parent dataset grandmaster clock
    quality class."
REFERENCE
    "Section 8.2.3.7 parentDS.grandmasterClockQuality of
    [IEEE 1588-2008]"
 ::= { ptpbaseClockParentDSEntry 11 }
```

ptpbaseClockParentDSGMClockQualityAccuracy OBJECT-TYPE

```
SYNTAX      ClockQualityAccuracyType
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "This object specifies the parent dataset grandmaster clock
    quality accuracy."
REFERENCE
    "Section 8.2.3.7 parentDS.grandmasterClockQuality of
    [IEEE 1588-2008]"
 ::= { ptpbaseClockParentDSEntry 12 }
```

Shankarkumar et al. Expires January 30, 2013 [Page 30]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

ptpbaseClockParentDSGMClockQualityOffset OBJECT-TYPE

```
SYNTAX      Unsigned32
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "This object specifies the parent dataset grandmaster clock
    quality offset."
REFERENCE
    "Section 8.2.3.7 parentDS.grandmasterClockQuality of
    [IEEE 1588-2008]"
 ::= { ptpbaseClockParentDSEntry 13 }
```

```
ptpbasedefaultDSTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF PtpbasedefaultDSEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Table of information about the PTP clock Default Datasets for
        all domains."
    ::= { ptpbaseMIBClockInfo 3 }
```

```
ptpbasedefaultDSEntry OBJECT-TYPE
    SYNTAX      PtpbasedefaultDSEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "An entry in the table, containing information about a single
        PTP clock Default Datasets for a domain."
    INDEX      {
                ptpbasedefaultDSDomainIndex,
                ptpbasedefaultDSClockTypeIndex,
                ptpbasedefaultDSInstanceIndex
            }
    ::= { ptpbasedefaultDSTable 1 }
```

```
PtpbasedefaultDSEntry ::= SEQUENCE {
    ptpbasedefaultDSDomainIndex      ClockDomainType,
    ptpbasedefaultDSClockTypeIndex   ClockType,
    ptpbasedefaultDSInstanceIndex    ClockInstanceType,
    ptpbasedefaultDSTwoStepFlag      TruthValue,
    ptpbasedefaultDSClockIdentity    ClockIdentity,
    ptpbasedefaultDSPriority1        Unsigned32,
    ptpbasedefaultDSPriority2        Unsigned32,
    ptpbasedefaultDSSlaveOnly        TruthValue,
    ptpbasedefaultDSQualityClass     ClockQualityClassType,
    ptpbasedefaultDSQualityAccuracy  ClockQualityAccuracyType,
    ptpbasedefaultDSQualityOffset    Integer32
}
```

Shankarkumar et al. Expires January 30, 2013 [Page 31]

Internet-Draft draft-ietf-tictoc-ptp-mib-03.txt July 30, 2012

```
ptpbasedefaultDSDomainIndex OBJECT-TYPE
    SYNTAX      ClockDomainType
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This object specifies the domain number used to create logical
        group of PTP devices."
    ::= { ptpbasedefaultDSEntry 1 }
```

```
ptpbasedefaultDSClockTypeIndex OBJECT-TYPE
    SYNTAX      ClockType
    MAX-ACCESS  not-accessible
    STATUS      current
```

DESCRIPTION

"This object specifies the clock type as defined in the Textual convention description."
::= { ptpbaseClockDefaultDSEntry 2 }

ptpbaseClockDefaultDSInstanceIndex OBJECT-TYPE

SYNTAX ClockInstanceType

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This object specifies the instance of the clock for this clock type in the given domain."
::= { ptpbaseClockDefaultDSEntry 3 }

ptpbaseClockDefaultDSTwoStepFlag OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object specifies whether the Two Step process is used."
::= { ptpbaseClockDefaultDSEntry 4 }

ptpbaseClockDefaultDSClockIdentity OBJECT-TYPE

SYNTAX ClockIdentity

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object specifies the default Datasets clock identity."
::= { ptpbaseClockDefaultDSEntry 5 }

ptpbaseClockDefaultDSPriority1 OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object specifies the default Datasets clock Priority1."
::= { ptpbaseClockDefaultDSEntry 6 }

ptpbaseClockDefaultDSPriority2 OBJECT-TYPE

Shankarkumar et al. Expires January 30, 2013 [Page 32]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

SYNTAX Unsigned32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object specifies the default Datasets clock Priority2."
::= { ptpbaseClockDefaultDSEntry 7 }

ptpbaseClockDefaultDSSlaveOnly OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Whether the SlaveOnly flag is set."


```

 ::= { ptpbaseClockDefaultDSEntry 8 }

ptpbaseClockDefaultDSQualityClass OBJECT-TYPE
    SYNTAX          ClockQualityClassType (0..255)
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the default dataset Quality Class."
    ::= { ptpbaseClockDefaultDSEntry 9 }

ptpbaseClockDefaultDSQualityAccuracy OBJECT-TYPE
    SYNTAX          ClockQualityAccuracyType
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the default dataset Quality Accuracy."
    ::= { ptpbaseClockDefaultDSEntry 10 }

ptpbaseClockDefaultDSQualityOffset OBJECT-TYPE
    SYNTAX          Integer32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the default dataset Quality offset."
    ::= { ptpbaseClockDefaultDSEntry 11 }

ptpbaseClockRunningTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF PtpbaseClockRunningEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Table of information about the PTP clock Running Datasets for
         all domains."
    ::= { ptpbaseMIBClockInfo 4 }

ptpbaseClockRunningEntry OBJECT-TYPE
    SYNTAX          PtpbaseClockRunningEntry

Shankarkumar et al.    Expires January 30, 2013    [Page 33]

Internet-Draft    draft-ietf-tictoc-ntp-mib-03.txt    July 30, 2012

    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "An entry in the table, containing information about a single
         PTP clock running Datasets for a domain."
    INDEX          {
                    ptpbaseClockRunningDomainIndex,
                    ptpbaseClockRunningClockTypeIndex,
                    ptpbaseClockRunningInstanceIndex
                }
    ::= { ptpbaseClockRunningTable 1 }

PtpbaseClockRunningEntry ::= SEQUENCE {

```

```

    ptpbaseClockRunningDomainIndex    ClockDomainType,
    ptpbaseClockRunningClockTypeIndex ClockType,
    ptpbaseClockRunningInstanceIndex  ClockInstanceType,
    ptpbaseClockRunningState          ClockStateType,
    ptpbaseClockRunningPacketsSent    Counter64,
    ptpbaseClockRunningPacketsReceived Counter64
}

```

ptpbaseClockRunningDomainIndex OBJECT-TYPE

```

SYNTAX      ClockDomainType
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION

```

"This object specifies the domain number used to create logical group of PTP devices."

```
 ::= { ptpbaseClockRunningEntry 1 }
```

ptpbaseClockRunningClockTypeIndex OBJECT-TYPE

```

SYNTAX      ClockType
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION

```

"This object specifies the clock type as defined in the Textual convention description."

```
 ::= { ptpbaseClockRunningEntry 2 }
```

ptpbaseClockRunningInstanceIndex OBJECT-TYPE

```

SYNTAX      ClockInstanceType
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION

```

"This object specifies the instance of the clock for this clock type in the given domain."

```
 ::= { ptpbaseClockRunningEntry 3 }
```

ptpbaseClockRunningState OBJECT-TYPE

```

SYNTAX      ClockStateType
MAX-ACCESS  read-only
STATUS      current

```

Shankarkumar et al. Expires January 30, 2013

[Page 34]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt

July 30, 2012

DESCRIPTION

"This object specifies the Clock state returned by PTP engine which was described earlier.

Freerun state. Applies to a slave device that is not locked to a master. This is the initial state a slave starts out with when

it is not getting any PTP packets from the master or because of some other input error (erroneous packets, etc).

Holdover state. In this state the slave device is locked to a master but communication with the master is lost or the timestamps in the ptp packets are incorrect. But since the

slave was locked to the master, it can run with the same accuracy for sometime. The slave can continue to operate in this state for some time. If communication with the master is not restored for a while, the device is moved to the FREERUN state.

Acquiring state. The slave device is receiving packets from a master and is trying to acquire a lock.

Freq_locked state. Slave device is locked to the Master with respect to frequency, but not phase aligned

Phase_aligned state. Locked to the master with respect to frequency and phase."

::= { ptpbaseClockRunningEntry 4 }

ptpbaseClockRunningPacketsSent OBJECT-TYPE

SYNTAX Counter64
MAX-ACCESS read-only
STATUS current

DESCRIPTION

"This object specifies the total number of all packet Unicast and multicast that have been sent out for this clock in this domain for this type."

::= { ptpbaseClockRunningEntry 5 }

ptpbaseClockRunningPacketsReceived OBJECT-TYPE

SYNTAX Counter64
MAX-ACCESS read-only
STATUS current

DESCRIPTION

"This object specifies the total number of all packet Unicast and multicast that have been received for this clock in this domain for this type."

::= { ptpbaseClockRunningEntry 6 }

ptpbaseClockTimePropertiesDSTable OBJECT-TYPE

Shankarkumar et al. Expires January 30, 2013

[Page 35]

Internet-Draft draft-ietf-tictoc-ptp-mib-03.txt

July 30, 2012

SYNTAX SEQUENCE OF PtpbaseClockTimePropertiesDSEntry
MAX-ACCESS not-accessible
STATUS current

DESCRIPTION

"Table of information about the PTP clock Timeproperties Datasets for all domains."

::= { ptpbaseMIBClockInfo 5 }

ptpbaseClockTimePropertiesDSEntry OBJECT-TYPE

SYNTAX PtpbaseClockTimePropertiesDSEntry
MAX-ACCESS not-accessible
STATUS current

DESCRIPTION

"An entry in the table, containing information about a single PTP clock timeproperties Datasets for a domain."

REFERENCE "Section 8.2.4 of [IEEE 1588-2008]"

INDEX {
 ptpbasedClockTimePropertiesDSDomainIndex,
 ptpbasedClockTimePropertiesDSClockTypeIndex,
 ptpbasedClockTimePropertiesDSInstanceIndex
}

::= { ptpbasedClockTimePropertiesDSTable 1 }

PtpbasedClockTimePropertiesDSEntry ::= SEQUENCE {
 ptpbasedClockTimePropertiesDSDomainIndex ClockDomainType,
 ptpbasedClockTimePropertiesDSClockTypeIndex ClockType,
 ptpbasedClockTimePropertiesDSInstanceIndex ClockInstanceType,
 ptpbasedClockTimePropertiesDSCurrentUTCOffsetValid TruthValue,
 ptpbasedClockTimePropertiesDSCurrentUTCOffset Integer32,
 ptpbasedClockTimePropertiesDSLeap59 TruthValue,
 ptpbasedClockTimePropertiesDSLeap61 TruthValue,
 ptpbasedClockTimePropertiesDSTimeTraceable TruthValue,
 ptpbasedClockTimePropertiesDSFreqTraceable TruthValue,
 ptpbasedClockTimePropertiesDSPTPTimescale TruthValue,
 ptpbasedClockTimePropertiesDSSource ClockTimeSourceType
}

ptpbasedClockTimePropertiesDSDomainIndex OBJECT-TYPE

SYNTAX ClockDomainType

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This object specifies the domain number used to create logical group of PTP devices."

::= { ptpbasedClockTimePropertiesDSEntry 1 }

ptpbasedClockTimePropertiesDSClockTypeIndex OBJECT-TYPE

SYNTAX ClockType

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This object specifies the clock type as defined in the

Shankarkumar et al. Expires January 30, 2013

[Page 36]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt

July 30, 2012

Textual convention description."
::= { ptpbasedClockTimePropertiesDSEntry 2 }

ptpbasedClockTimePropertiesDSInstanceIndex OBJECT-TYPE

SYNTAX ClockInstanceType

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This object specifies the instance of the clock for this clock type in the given domain."

::= { ptpbasedClockTimePropertiesDSEntry 3 }

ptpbasedClockTimePropertiesDSCurrentUTCOffsetValid OBJECT-TYPE

SYNTAX TruthValue
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the timeproperties dataset value of whether current UTC offset is valid."
REFERENCE "Section 8.2.4.2 of [IEEE 1588-2008]"
::= { ptpbaseClockTimePropertiesDSEntry 4 }

ptpbaseClockTimePropertiesDSCurrentUTCOffset OBJECT-TYPE

SYNTAX Integer32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the timeproperties dataset value of current UTC offset.

In PTP systems whose epoch is the PTP epoch, the value of timePropertiesDS.currentUtcOffset is the offset between TAI and UTC; otherwise the value has no meaning. The value shall be in units of seconds.

The initialization value shall be selected as follows:

a) If the timePropertiesDS.ptpTimescale (see 8.2.4.8) is TRUE, the value is the value obtained from a primary reference if the value is known at the time of initialization, else.

b) The value shall be the current number of leap seconds (7.2.3) when the node is designed."

REFERENCE "Section 8.2.4.3 of [IEEE 1588-2008]"
::= { ptpbaseClockTimePropertiesDSEntry 5 }

ptpbaseClockTimePropertiesDSLeap59 OBJECT-TYPE

SYNTAX TruthValue
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the Leap59 value in the clock Current Dataset."
REFERENCE "Section 8.2.4.4 of [IEEE 1588-2008]"

Shankarkumar et al. Expires January 30, 2013 [Page 37]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

::= { ptpbaseClockTimePropertiesDSEntry 6 }

ptpbaseClockTimePropertiesDSLeap61 OBJECT-TYPE

SYNTAX TruthValue
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the Leap61 value in the clock Current Dataset."
REFERENCE "Section 8.2.4.5 of [IEEE 1588-2008]"
::= { ptpbaseClockTimePropertiesDSEntry 7 }

ptpbaseClockTimePropertiesDSTimeTraceable OBJECT-TYPE

SYNTAX TruthValue
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the Timetraceable value in the clock
Current Dataset."
REFERENCE "Section 8.2.4.6 of [IEEE 1588-2008]"
::= { ptpbaseClockTimePropertiesDSEntry 8 }

ptpbaseClockTimePropertiesDSFreqTraceable OBJECT-TYPE

SYNTAX TruthValue
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the Frequency Traceable value in the
clock Current Dataset."
REFERENCE "Section 8.2.4.7 of [IEEE 1588-2008]"
::= { ptpbaseClockTimePropertiesDSEntry 9 }

ptpbaseClockTimePropertiesDSPTPTimescale OBJECT-TYPE

SYNTAX TruthValue
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the PTP Timescale value in the clock
Current Dataset."
REFERENCE "Section 8.2.4.8 of [IEEE 1588-2008]"
::= { ptpbaseClockTimePropertiesDSEntry 10 }

ptpbaseClockTimePropertiesDSSource OBJECT-TYPE

SYNTAX ClockTimeSourceType
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the Timesource value in the clock Current
Dataset."
REFERENCE "Section 8.2.4.9 of [IEEE 1588-2008]"
::= { ptpbaseClockTimePropertiesDSEntry 11 }

Shankarkumar et al. Expires January 30, 2013 [Page 38]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

ptpbaseClockTransDefaultDSTable OBJECT-TYPE

SYNTAX SEQUENCE OF PtpbaseClockTransDefaultDSEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
"Table of information about the PTP Transparent clock Default
Datasets for all domains."
::= { ptpbaseMIBClockInfo 6 }

ptpbaseClockTransDefaultDSEntry OBJECT-TYPE

SYNTAX PtpbaseClockTransDefaultDSEntry

```

MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "An entry in the table, containing information about a single
    PTP Transparent clock Default Datasets for a domain."
REFERENCE       "Section 8.3.2 of [IEEE 1588-2008]"
INDEX          {
                ptpbaseClockTransDefaultDSDomainIndex,
                ptpbaseClockTransDefaultDSInstanceIndex
            }
 ::= { ptpbaseClockTransDefaultDSTable 1 }

```

```

PtpbaseClockTransDefaultDSEntry ::= SEQUENCE {
    ptpbaseClockTransDefaultDSDomainIndex  ClockDomainType,
    ptpbaseClockTransDefaultDSInstanceIndex ClockInstanceType,
    ptpbaseClockTransDefaultDSClockIdentity ClockIdentity,
    ptpbaseClockTransDefaultDSNumOfPorts   Counter32,
    ptpbaseClockTransDefaultDSDelay        ClockMechanismType,
    ptpbaseClockTransDefaultDSPrimaryDomain Integer32
}

```

```

ptpbaseClockTransDefaultDSDomainIndex OBJECT-TYPE
SYNTAX      ClockDomainType
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This object specifies the domain number used to create logical
    group of PTP devices."
 ::= { ptpbaseClockTransDefaultDSEntry 1 }

```

```

ptpbaseClockTransDefaultDSInstanceIndex OBJECT-TYPE
SYNTAX      ClockInstanceType
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This object specifies the instance of the clock for this clock
    type in the given domain."
 ::= { ptpbaseClockTransDefaultDSEntry 2 }

```

Shankarkumar et al. Expires January 30, 2013 [Page 39]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

```

ptpbaseClockTransDefaultDSClockIdentity OBJECT-TYPE
SYNTAX      ClockIdentity
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "This object specifies the value of the clockIdentity attribute
    of the local clock."
REFERENCE   "Section 8.3.2.2.1 of [IEEE 1588-2008]"
 ::= { ptpbaseClockTransDefaultDSEntry 3 }

```

```

ptpbaseClockTransDefaultDSNumOfPorts OBJECT-TYPE
SYNTAX      Counter32
MAX-ACCESS  read-only

```

STATUS current
DESCRIPTION
"This object specifies the number of PTP ports of the device."
REFERENCE "Section 8.3.2.2.2 of [IEEE 1588-2008]"
::= { ptpbaseClockTransDefaultDSEntry 4 }

ptpbaseClockTransDefaultDSDelay OBJECT-TYPE

SYNTAX ClockMechanismType
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object, if the transparent clock is an end-to-end transparent clock, has the value shall be E2E; If the transparent clock is a peer-to-peer transparent clock, the value shall be P2P."
REFERENCE "Section 8.3.2.3.1 of [IEEE 1588-2008]"
::= { ptpbaseClockTransDefaultDSEntry 5 }

ptpbaseClockTransDefaultDSPrimaryDomain OBJECT-TYPE

SYNTAX Integer32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the value of the primary syntonization domain. The initialization value shall be 0."
REFERENCE "Section 8.3.2.3.2 of [IEEE 1588-2008]"
::= { ptpbaseClockTransDefaultDSEntry 6 }

ptpbaseClockPortTable OBJECT-TYPE

SYNTAX SEQUENCE OF PtpbaseClockPortEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
"Table of information about the clock ports for a particular domain."
::= { ptpbaseMIBClockInfo 7 }

Shankarkumar et al. Expires January 30, 2013 [Page 40]

Internet-Draft draft-ietf-tictoc-ptp-mib-03.txt July 30, 2012

ptpbaseClockPortEntry OBJECT-TYPE

SYNTAX PtpbaseClockPortEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
"An entry in the table, containing information about a single clock port."
INDEX {
ptpbaseClockPortDomainIndex,
ptpbaseClockPortClockTypeIndex,
ptpbaseClockPortClockInstanceIndex,
ptpbaseClockPortTablePortNumberIndex


```

    }
    ::= { ptpbaseClockPortTable 1 }

PtpbaseClockPortEntry ::= SEQUENCE {
    ptpbaseClockPortDomainIndex      ClockDomainType,
    ptpbaseClockPortClockTypeIndex   ClockType,
    ptpbaseClockPortClockInstanceIndex ClockInstanceType,
    ptpbaseClockPortTablePortNumberIndex ClockPortNumber,
    ptpbaseClockPortName              DisplayString,
    ptpbaseClockPortRole              ClockRoleType,
    ptpbaseClockPortSyncOneStep       TruthValue,
    ptpbaseClockPortCurrentPeerAddressType ClockPortTransportType,
    ptpbaseClockPortCurrentPeerAddress ClockPortTransportTypeAddress,
    ptpbaseClockPortNumOfAssociatedPorts Gauge32
}

```

```

ptpbaseClockPortDomainIndex OBJECT-TYPE
    SYNTAX      ClockDomainType
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This object specifies the domain number used to create logical
        group of PTP devices."
    ::= { ptpbaseClockPortEntry 1 }

```

```

ptpbaseClockPortClockTypeIndex OBJECT-TYPE
    SYNTAX      ClockType
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This object specifies the clock type as defined in the
        Textual convention description."
    ::= { ptpbaseClockPortEntry 2 }

```

```

ptpbaseClockPortClockInstanceIndex OBJECT-TYPE
    SYNTAX      ClockInstanceType
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION

```

Shankarkumar et al. Expires January 30, 2013 [Page 41]

Internet-Draft draft-ietf-tictoc-ptp-mib-03.txt July 30, 2012

```

    "This object specifies the instance of the clock for this clock
    type in the given domain."
    ::= { ptpbaseClockPortEntry 3 }

```

```

ptpbaseClockPortTablePortNumberIndex OBJECT-TYPE
    SYNTAX      ClockPortNumber (1..65535)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This object specifies the PTP Portnumber for this port."
    ::= { ptpbaseClockPortEntry 4 }

```

```

ptpbaseClockPortName OBJECT-TYPE

```

SYNTAX DisplayString (SIZE (1..64))
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the PTP clock port name configured on the
router."
::= { ptpbaseClockPortEntry 5 }

ptpbaseClockPortRole OBJECT-TYPE
SYNTAX ClockRoleType
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object describes the current role (slave/master) of the
port."
::= { ptpbaseClockPortEntry 6 }

ptpbaseClockPortSyncOneStep OBJECT-TYPE
SYNTAX TruthValue
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies that one-step clock operation between
the PTP master and slave device is enabled."
::= { ptpbaseClockPortEntry 7 }

ptpbaseClockPortCurrentPeerAddressType OBJECT-TYPE
SYNTAX ClockPortTransportType
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the current peer's network address used
for PTP communication."
::= { ptpbaseClockPortEntry 8 }

ptpbaseClockPortCurrentPeerAddress OBJECT-TYPE
SYNTAX ClockPortTransportTypeAddress
MAX-ACCESS read-only
STATUS current

Shankarkumar et al. Expires January 30, 2013 [Page 42]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

DESCRIPTION
"This object specifies the current peer's network address used
for PTP communication."
::= { ptpbaseClockPortEntry 9 }

ptpbaseClockPortNumOfAssociatedPorts OBJECT-TYPE
SYNTAX Gauge32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies -
For a master port - the number of PTP slave sessions (peers)
associated with this PTP port."

For a slave port - the number of masters available to this slave port (might or might not be peered)."
 ::= { ptpbaseClockPortEntry 10 }

ptpbaseClockPortDSTable OBJECT-TYPE
SYNTAX SEQUENCE OF PtpbaseClockPortDSEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
"Table of information about the clock ports dataset for a particular domain."
 ::= { ptpbaseMIBClockInfo 8 }

ptpbaseClockPortDSEntry OBJECT-TYPE
SYNTAX PtpbaseClockPortDSEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
"An entry in the table, containing port dataset information for a single clock port."
INDEX {
 ptpbaseClockPortDSDomainIndex,
 ptpbaseClockPortDSClockTypeIndex,
 ptpbaseClockPortDSClockInstanceIndex,
 ptpbaseClockPortDSPortNumberIndex
 }
 ::= { ptpbaseClockPortDSTable 1 }

PtpbaseClockPortDSEntry ::= SEQUENCE {
 ptpbaseClockPortDSDomainIndex ClockDomainType,
 ptpbaseClockPortDSClockTypeIndex ClockType,
 ptpbaseClockPortDSClockInstanceIndex ClockInstanceType,
 ptpbaseClockPortDSPortNumberIndex ClockPortNumber,
 ptpbaseClockPortDSName DisplayString,
 ptpbaseClockPortDSPortIdentity OCTET STRING,
 ptpbaseClockPortDSAnnouncementInterval Integer32,
 ptpbaseClockPortDSAnnounceRctTimeout Integer32,

Shankarkumar et al. Expires January 30, 2013 [Page 43]

Internet-Draft draft-ietf-tictoc-ptp-mib-03.txt July 30, 2012

ptpbaseClockPortDSSyncInterval Integer32,
 ptpbaseClockPortDSMinDelayReqInterval Integer32,
 ptpbaseClockPortDSPeerDelayReqInterval Integer32,
 ptpbaseClockPortDSDelayMech ClockMechanismType,
 ptpbaseClockPortDSPeerMeanPathDelay ClockTimeInterval,
 ptpbaseClockPortDSGrantDuration Unsigned32,
 ptpbaseClockPortDSPTPVersion Integer32
 }

ptpbaseClockPortDSDomainIndex OBJECT-TYPE
SYNTAX ClockDomainType
MAX-ACCESS not-accessible
STATUS current

DESCRIPTION

"This object specifies the domain number used to create logical group of PTP devices."

::= { ptpbaseClockPortDSEntry 1 }

ptpbaseClockPortDSClockTypeIndex OBJECT-TYPE

SYNTAX ClockType

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This object specifies the clock type as defined in the Textual convention description."

::= { ptpbaseClockPortDSEntry 2 }

ptpbaseClockPortDSClockInstanceIndex OBJECT-TYPE

SYNTAX ClockInstanceType

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This object specifies the instance of the clock for this clock type in the given domain."

::= { ptpbaseClockPortDSEntry 3 }

ptpbaseClockPortDSPortNumberIndex OBJECT-TYPE

SYNTAX ClockPortNumber (1..65535)

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This object specifies the PTP portnumber associated with this PTP port."

::= { ptpbaseClockPortDSEntry 4 }

ptpbaseClockPortDSName OBJECT-TYPE

SYNTAX DisplayString (SIZE (1..64))

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object specifies the PTP clock port name."

::= { ptpbaseClockPortDSEntry 5 }

Shankarkumar et al. Expires January 30, 2013

[Page 44]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt

July 30, 2012

ptpbaseClockPortDSPortIdentity OBJECT-TYPE

SYNTAX OCTET STRING(SIZE(1..256))

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object specifies the PTP clock port Identity."

::= { ptpbaseClockPortDSEntry 6 }

ptpbaseClockPortDSAnnouncementInterval OBJECT-TYPE

SYNTAX Integer32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object specifies the Announce message transmission interval associated with this clock port."
::= { ptpbaseClockPortDSEntry 7 }

ptpbaseClockPortDSAnnounceRctTimeout OBJECT-TYPE

SYNTAX Integer32
MAX-ACCESS read-only
STATUS current

DESCRIPTION

"This object specifies the Announce receipt timeout associated with this clock port."
::= { ptpbaseClockPortDSEntry 8 }

ptpbaseClockPortDSSyncInterval OBJECT-TYPE

SYNTAX Integer32
MAX-ACCESS read-only
STATUS current

DESCRIPTION

"This object specifies the Sync message transmission interval."
::= { ptpbaseClockPortDSEntry 9 }

ptpbaseClockPortDSMinDelayReqInterval OBJECT-TYPE

SYNTAX Integer32
MAX-ACCESS read-only
STATUS current

DESCRIPTION

"This object specifies the Delay_Req message transmission interval."
::= { ptpbaseClockPortDSEntry 10 }

ptpbaseClockPortDSPeerDelayReqInterval OBJECT-TYPE

SYNTAX Integer32
MAX-ACCESS read-only
STATUS current

DESCRIPTION

"This object specifies the Pdelay_Req message transmission interval."
::= { ptpbaseClockPortDSEntry 11 }

Shankarkumar et al. Expires January 30, 2013

[Page 45]

Internet-Draft draft-ietf-tictoc-ptp-mib-03.txt

July 30, 2012

ptpbaseClockPortDSDelayMech OBJECT-TYPE

SYNTAX ClockMechanismType
MAX-ACCESS read-only
STATUS current

DESCRIPTION

"This object specifies the delay mechanism used. If the clock is an end-to-end clock, the value of the is e2e, else if the clock is a peer to-peer clock, the value shall be p2p."
::= { ptpbaseClockPortDSEntry 12 }

ptpbaseClockPortDSPeerMeanPathDelay OBJECT-TYPE

SYNTAX ClockTimeInterval

MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the peer meanPathDelay."
::= { ptpbaseClockPortDSEntry 13 }

ptpbaseClockPortDSGrantDuration OBJECT-TYPE
SYNTAX Unsigned32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the grant duration allocated by the master."
::= { ptpbaseClockPortDSEntry 14 }

ptpbaseClockPortDSPTPVersion OBJECT-TYPE
SYNTAX Integer32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the PTP version being used."
::= { ptpbaseClockPortDSEntry 15 }

ptpbaseClockPortRunningTable OBJECT-TYPE
SYNTAX SEQUENCE OF PtpbaseClockPortRunningEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
"Table of information about the clock ports running dataset for a particular domain."
::= { ptpbaseMIBClockInfo 9 }

ptpbaseClockPortRunningEntry OBJECT-TYPE
SYNTAX PtpbaseClockPortRunningEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION

Shankarkumar et al. Expires January 30, 2013 [Page 46]

Internet-Draft draft-ietf-tictoc-ptp-mib-03.txt July 30, 2012

"An entry in the table, containing running dataset information about a single clock port."
INDEX {
ptpbaseClockPortRunningDomainIndex,
ptpbaseClockPortRunningClockTypeIndex,
ptpbaseClockPortRunningClockInstanceIndex,
ptpbaseClockPortRunningPortNumberIndex
}
::= { ptpbaseClockPortRunningTable 1 }

PtpbaseClockPortRunningEntry ::= SEQUENCE {
ptpbaseClockPortRunningDomainIndex ClockDomainType,
ptpbaseClockPortRunningClockTypeIndex ClockType,

```

    ptpbaseClockPortRunningClockInstanceIndex ClockInstanceType,
    ptpbaseClockPortRunningPortNumberIndex   ClockPortNumber,
    ptpbaseClockPortRunningName              DisplayString,
    ptpbaseClockPortRunningState             ClockPortState,
    ptpbaseClockPortRunningRole              ClockRoleType,
    ptpbaseClockPortRunningInterfaceIndex    InterfaceIndexOrZero,
    ptpbaseClockPortRunningTransport         ClockPortTransportType,
    ptpbaseClockPortRunningEncapsulationType Integer32,
    ptpbaseClockPortRunningTxMode           ClockTxModeType,
    ptpbaseClockPortRunningRxMode           ClockTxModeType,
    ptpbaseClockPortRunningPacketsReceived   Counter64,
    ptpbaseClockPortRunningPacketsSent       Counter64
}

```

```

ptpbaseClockPortRunningDomainIndex OBJECT-TYPE
    SYNTAX          ClockDomainType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the domain number used to create logical
        group of PTP devices."
    ::= { ptpbaseClockPortRunningEntry 1 }

```

```

ptpbaseClockPortRunningClockTypeIndex OBJECT-TYPE
    SYNTAX          ClockType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the clock type as defined in the
        Textual convention description."
    ::= { ptpbaseClockPortRunningEntry 2 }

```

```

ptpbaseClockPortRunningClockInstanceIndex OBJECT-TYPE
    SYNTAX          ClockInstanceType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the instance of the clock for this clock
        type in the given domain."

```

Shankarkumar et al. Expires January 30, 2013 [Page 47]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

```

::= { ptpbaseClockPortRunningEntry 3 }

```

```

ptpbaseClockPortRunningPortNumberIndex OBJECT-TYPE
    SYNTAX          ClockPortNumber (1..65535)
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the PTP portnumber associated with this
        clock port."
    ::= { ptpbaseClockPortRunningEntry 4 }

```

```

ptpbaseClockPortRunningName OBJECT-TYPE
    SYNTAX          DisplayString (SIZE (1..64))

```

MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the PTP clock port name."
::= { ptpbaseClockPortRunningEntry 5 }

ptpbaseClockPortRunningState OBJECT-TYPE

SYNTAX ClockPortState
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the port state returned by PTP engine."

initializing - In this state a port initializes its data sets, hardware, and communication facilities.
faulty - The fault state of the protocol.
disabled - The port shall not place any messages on its communication path.
listening - The port is waiting for the announceReceiptTimeout to expire or to receive an Announce message from a master.
preMaster - The port shall behave in all respects as though it were in the MASTER state except that it shall not place any messages on its communication path except for Pdelay_Req, Pdelay_Resp, Pdelay_Resp_Follow_Up, signaling, or management messages.
master - The port is behaving as a master port.
passive - The port shall not place any messages on its communication path except for Pdelay_Req, Pdelay_Resp, Pdelay_Resp_Follow_Up, or signaling messages, or management messages that are a required response to another management message
uncalibrated - The local port is preparing to

Shankarkumar et al. Expires January 30, 2013 [Page 48]

Internet-Draft draft-ietf-tictoc-ptp-mib-03.txt July 30, 2012

slave - synchronize to the master port.
- The port is synchronizing to the selected master port."
::= { ptpbaseClockPortRunningEntry 6 }

ptpbaseClockPortRunningRole OBJECT-TYPE

SYNTAX ClockRoleType
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the Clock Role."
::= { ptpbaseClockPortRunningEntry 7 }

ptpbasedClockPortRunningInterfaceIndex OBJECT-TYPE
SYNTAX InterfaceIndexOrZero
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the interface on the router being used by
the PTP Clock for PTP communication."
::= { ptpbasedClockPortRunningEntry 8 }

ptpbasedClockPortRunningTransport OBJECT-TYPE
SYNTAX ClockPortTransportType
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the transport protocol being used for PTP
communication (the mapping used)."
::= { ptpbasedClockPortRunningEntry 9 }

ptpbasedClockPortRunningEncapsulationType OBJECT-TYPE
SYNTAX Integer32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the type of encapsulation if the
interface is adding extra layers (eg. VLAN, Pseudowire
encapsulation...) for the PTP messages."
::= { ptpbasedClockPortRunningEntry 10 }

ptpbasedClockPortRunningTxMode OBJECT-TYPE
SYNTAX ClockTxModeType
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the clock transmission mode as

unicast: Using unicast communication channel.
multicast: Using Multicast communication channel.
multicast-mix: Using multicast-unicast communication channel"
::= { ptpbasedClockPortRunningEntry 11 }

Shankarkumar et al. Expires January 30, 2013 [Page 49]

Internet-Draft draft-ietf-tictoc-ptp-mib-03.txt July 30, 2012

ptpbasedClockPortRunningRxMode OBJECT-TYPE
SYNTAX ClockTxModeType
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the clock receive mode as

unicast: Using unicast communication channel.
multicast: Using Multicast communication channel.
multicast-mix: Using multicast-unicast communication channel"
::= { ptpbasedClockPortRunningEntry 12 }

ptpbaseClockPortRunningPacketsReceived OBJECT-TYPE

SYNTAX Counter64

UNITS "packets"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object specifies the packets received on the clock port (cumulative)."

::= { ptpbaseClockPortRunningEntry 13 }

ptpbaseClockPortRunningPacketsSent OBJECT-TYPE

SYNTAX Counter64

UNITS "packets"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object specifies the packets sent on the clock port (cumulative)."

::= { ptpbaseClockPortRunningEntry 14 }

ptpbaseClockPortTransDSTable OBJECT-TYPE

SYNTAX SEQUENCE OF PtpbaseClockPortTransDSEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Table of information about the Transparent clock ports running dataset for a particular domain."

::= { ptpbaseMIBClockInfo 10 }

ptpbaseClockPortTransDSEntry OBJECT-TYPE

SYNTAX PtpbaseClockPortTransDSEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in the table, containing clock port Transparent dataset information about a single clock port"

INDEX {

Shankarkumar et al. Expires January 30, 2013

[Page 50]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt

July 30, 2012

ptpbaseClockPortTransDSDomainIndex,
ptpbaseClockPortTransDSInstanceIndex,
ptpbaseClockPortTransDSPortNumberIndex

}

::= { ptpbaseClockPortTransDSTable 1 }

PtpbaseClockPortTransDSEntry ::= SEQUENCE {

ptpbaseClockPortTransDSDomainIndex	ClockDomainType,
ptpbaseClockPortTransDSInstanceIndex	ClockInstanceType,
ptpbaseClockPortTransDSPortNumberIndex	ClockPortNumber,
ptpbaseClockPortTransDSPortIdentity	ClockIdentity,
ptpbaseClockPortTransDSLogMinPdelayReqInt	Integer32,
ptpbaseClockPortTransDSFaultyFlag	TruthValue,

```

        ptpbaseClockPortTransDSPeerMeanPathDelay ClockTimeInterval
    }

ptpbaseClockPortTransDSDomainIndex OBJECT-TYPE
    SYNTAX          ClockDomainType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the domain number used to create logical
        group of PTP devices."
    ::= { ptpbaseClockPortTransDSEntry 1 }

```

```

ptpbaseClockPortTransDSInstanceIndex OBJECT-TYPE
    SYNTAX          ClockInstanceType
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the instance of the clock for this clock
        type in the given domain."
    ::= { ptpbaseClockPortTransDSEntry 2 }

```

```

ptpbaseClockPortTransDSPortNumberIndex OBJECT-TYPE
    SYNTAX          ClockPortNumber (1..65535)
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This object specifies the PTP port number associated with this
        port."
    REFERENCE       "Section 7.5.2 Port Identity [IEEE 1588-2008]"
    ::= { ptpbaseClockPortTransDSEntry 3 }

```

```

ptpbaseClockPortTransDSPortIdentity OBJECT-TYPE
    SYNTAX          ClockIdentity
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the value of the PortIdentity
        attribute of the local port."
    REFERENCE       "Section 8.3.3.2.1 of [IEEE 1588-2008]"

```

Shankarkumar et al. Expires January 30, 2013 [Page 51]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

```

    ::= { ptpbaseClockPortTransDSEntry 4 }

```

```

ptpbaseClockPortTransDSlogMinPdelayReqInt OBJECT-TYPE
    SYNTAX          Integer32
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "This object specifies the value of the logarithm to the
        base 2 of the minPdelayReqInterval."
    REFERENCE       "Section 8.3.3.3.1 of [IEEE 1588-2008]"
    ::= { ptpbaseClockPortTransDSEntry 5 }

```

```

ptpbaseClockPortTransDSFaultyFlag OBJECT-TYPE

```

SYNTAX TruthValue
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies the value TRUE if the port is faulty
and FALSE if the port is operating normally."
REFERENCE "Section 8.3.3.3.2 of [IEEE 1588-2008]"
::= { ptpbaseClockPortTransDSEntry 6 }

ptpbaseClockPortTransDSPeerMeanPathDelay OBJECT-TYPE

SYNTAX ClockTimeInterval
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"This object specifies, (if the delayMechanism used is P2P) the
value is the estimate of the current one-way propagation delay,
i.e., <meanPathDelay> on the link attached to this port
computed
using the peer delay mechanism. If the value of the
delayMechanism
used is E2E, then the value will be zero."
REFERENCE "Section 8.3.3.3.3 of [IEEE 1588-2008]"
::= { ptpbaseClockPortTransDSEntry 7 }

ptpbaseClockPortAssociateTable OBJECT-TYPE

SYNTAX SEQUENCE OF PtpbaseClockPortAssociateEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION

"Table of information about a given port's associated ports.

For a master port - multiple slave ports which have established
sessions with the current master port.

For a slave port - the list of masters available for a given
slave port.

Session information (pkts, errors) to be displayed based on

Shankarkumar et al. Expires January 30, 2013 [Page 52]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

availability and scenario."
::= { ptpbaseMIBClockInfo 11 }

ptpbaseClockPortAssociateEntry OBJECT-TYPE

SYNTAX PtpbaseClockPortAssociateEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION

"An entry in the table, containing information about a single
associated port for the given clockport."

INDEX {
ptpClockPortCurrentDomainIndex,
ptpClockPortCurrentClockTypeIndex,

```

        ptpClockPortCurrentClockInstanceIndex,
        ptpClockPortCurrentPortNumberIndex,
        ptpbaseClockPortAssociatePortIndex
    }
    ::= { ptpbaseClockPortAssociateTable 1 }

PtpbaseClockPortAssociateEntry ::= SEQUENCE {
    ptpClockPortCurrentDomainIndex      ClockDomainType,
    ptpClockPortCurrentClockTypeIndex   ClockType,
    ptpClockPortCurrentClockInstanceIndex ClockInstanceType,
    ptpClockPortCurrentPortNumberIndex  ClockPortNumber,
    ptpbaseClockPortAssociatePortIndex  Unsigned32,
    ptpbaseClockPortAssociateAddressType ClockPortTransportType,
    ptpbaseClockPortAssociateAddress     ClockPortTransportTypeAddress,
    ptpbaseClockPortAssociatePacketsSent Counter64,
    ptpbaseClockPortAssociatePacketsReceived Counter64,
    ptpbaseClockPortAssociateInErrors    Counter64,
    ptpbaseClockPortAssociateOutErrors   Counter64
}

```

```

ptpClockPortCurrentDomainIndex OBJECT-TYPE
    SYNTAX      ClockDomainType
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This object specifies the given port's domain number."
    ::= { ptpbaseClockPortAssociateEntry 1 }

```

```

ptpClockPortCurrentClockTypeIndex OBJECT-TYPE
    SYNTAX      ClockType
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This object specifies the given port's clock type."
    ::= { ptpbaseClockPortAssociateEntry 2 }

```

```

ptpClockPortCurrentClockInstanceIndex OBJECT-TYPE
    SYNTAX      ClockInstanceType
    MAX-ACCESS  not-accessible

```

Shankarkumar et al. Expires January 30, 2013 [Page 53]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

```

    STATUS      current
    DESCRIPTION
        "This object specifies the instance of the clock for this clock
        type in the given domain."
    ::= { ptpbaseClockPortAssociateEntry 3 }

```

```

ptpClockPortCurrentPortNumberIndex OBJECT-TYPE
    SYNTAX      ClockPortNumber
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This object specifies the PTP Port Number for the given port."
    ::= { ptpbaseClockPortAssociateEntry 4 }

```

```

ptpbaseClockPortAssociatePortIndex OBJECT-TYPE
    SYNTAX      Unsigned32 (1..65535)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This object specifies the associated port's serial number in
        the current port's context."
    ::= { ptpbaseClockPortAssociateEntry 5 }

ptpbaseClockPortAssociateAddressType OBJECT-TYPE
    SYNTAX      ClockPortTransportType
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This object specifies the peer port's network address type used
        for PTP communication."
    ::= { ptpbaseClockPortAssociateEntry 6 }

ptpbaseClockPortAssociateAddress OBJECT-TYPE
    SYNTAX      ClockPortTransportTypeAddress
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This object specifies the peer port's network address used for
        PTP communication."
    ::= { ptpbaseClockPortAssociateEntry 7 }

ptpbaseClockPortAssociatePacketsSent OBJECT-TYPE
    SYNTAX      Counter64
    UNITS       "packets"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The number of packets sent to this peer port from the current
        port."
    ::= { ptpbaseClockPortAssociateEntry 8 }

ptpbaseClockPortAssociatePacketsReceived OBJECT-TYPE

Shankarkumar et al.    Expires January 30, 2013    [Page 54]

Internet-Draft    draft-ietf-tictoc-ptp-mib-03.txt    July 30, 2012

    SYNTAX      Counter64
    UNITS       "packets"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The number of packets received from this peer port by the
        current port."
    ::= { ptpbaseClockPortAssociateEntry 9 }

ptpbaseClockPortAssociateInErrors OBJECT-TYPE
    SYNTAX      Counter64
    UNITS       "packets"
    MAX-ACCESS  read-only

```

```

STATUS          current
DESCRIPTION
    "This object specifies the input errors associated with the
    peer port."
 ::= { ptpbaseClockPortAssociateEntry 10 }

ptpbaseClockPortAssociateOutErrors OBJECT-TYPE
SYNTAX          Counter64
UNITS           "packets"
MAX-ACCESS      read-only
STATUS          current
DESCRIPTION
    "This object specifies the output errors associated with the
    peer port."
 ::= { ptpbaseClockPortAssociateEntry 11 }

ptpbaseMIBNotifs OBJECT IDENTIFIER
 ::= { ptpbaseMIB 0 }

ptpbaseMIBObjects OBJECT IDENTIFIER
 ::= { ptpbaseMIB 1 }

ptpbaseMIBConformance OBJECT IDENTIFIER
 ::= { ptpbaseMIB 2 }

ptpbaseMIBSystemInfo OBJECT IDENTIFIER
 ::= { ptpbaseMIBObjects 1 }

-- Conformance Information Definition

ptpbaseMIBCompliances OBJECT IDENTIFIER
 ::= { ptpbaseMIBConformance 1 }

ptpbaseMIBGroups OBJECT IDENTIFIER
 ::= { ptpbaseMIBConformance 2 }

ptpbaseMIBCompliancesSystemInfo MODULE-COMPLIANCE

Shankarkumar et al.    Expires January 30, 2013                [Page 55]

Internet-Draft        draft-ietf-tictoc-ptp-mib-03.txt        July 30, 2012

STATUS          current
DESCRIPTION
    "Compliance statement for agents that provide read-only support
    for PTPBASE-MIB to provide system level information of clock devices.
    Such devices can only be monitored using this MIB module.

    The Module is implemented with support for read-only. In other
    words, only monitoring is available by implementing this
    MODULE-COMPLIANCE."
MODULE           -- this module
MANDATORY-GROUPS { ptpbaseMIBSystemInfoGroup }
 ::= { ptpbaseMIBCompliances 1 }

```

```

ptpbasesMIBCompliancesClockInfo MODULE-COMPLIANCE
  STATUS          current
  DESCRIPTION
    "Compliance statement for agents that provide read-only support
    for PTPBASE-MIB to provide clock related information. Such devices can
    only be monitored using this MIB module.

    The Module is implemented with support for read-only. In other
    words, only monitoring is available by implementing this
    MODULE-COMPLIANCE."
  MODULE          -- this module
  MANDATORY-GROUPS {
    ptpbasesMIBClockCurrentDSGroup,
    ptpbasesMIBClockParentDSGroup,
    ptpbasesMIBClockDefaultDSGroup,
    ptpbasesMIBClockRunningGroup,
    ptpbasesMIBClockTimepropertiesGroup
  }
  ::= { ptpbasesMIBCompliances 2 }

```

```

ptpbasesMIBCompliancesClockPortInfo MODULE-COMPLIANCE
  STATUS          current
  DESCRIPTION
    "Compliance statement for agents that provide read-only support
    for PTPBASE-MIB to provide clock port related information. Such devices
    can only be monitored using this MIB module.

    The Module is implemented with support for read-only. In other
    words, only monitoring is available by implementing this
    MODULE-COMPLIANCE."
  MODULE          -- this module
  MANDATORY-GROUPS {
    ptpbasesMIBClockPortGroup,
    ptpbasesMIBClockPortDSGroup,
    ptpbasesMIBClockPortRunningGroup,
    ptpbasesMIBClockPortAssociateGroup
  }
  ::= { ptpbasesMIBCompliances 3 }

```

Shankarkumar et al. Expires January 30, 2013 [Page 56]

Internet-Draft draft-ietf-tictoc-ptp-mib-03.txt July 30, 2012

```

ptpbasesMIBCompliancesTransparentClockInfo MODULE-COMPLIANCE
  STATUS          current
  DESCRIPTION
    "Compliance statement for agents that provide read-only support
    for PTPBASE-MIB to provide Transparent clock related information. Such
    devices can only be monitored using this MIB module.

    The Module is implemented with support for read-only. In other
    words, only monitoring is available by implementing this
    MODULE-COMPLIANCE."
  MODULE          -- this module
  MANDATORY-GROUPS {
    ptpbasesMIBClockTranparentDSGroup,

```



```

        ptpbaseMIBClockPortTransDSGroup
    }
    ::= { ptpbaseMIBCompliances 4 }

ptpbaseMIBSystemInfoGroup OBJECT-GROUP
OBJECTS
    {
        ptpbaseSystemDomainTotals,
        ptpDomainClockPortsTotal,
        ptpbaseSystemProfile
    }
STATUS
    current
DESCRIPTION
    "Group which aggregates objects describing system-wide
    information"
    ::= { ptpbaseMIBGroups 1 }

ptpbaseMIBClockCurrentDSGroup OBJECT-GROUP
OBJECTS
    {
        ptpbaseClockCurrentDSStepsRemoved,
        ptpbaseClockCurrentDSOffsetFromMaster,
        ptpbaseClockCurrentDSMeanPathDelay
    }
STATUS
    current
DESCRIPTION
    "Group which aggregates objects describing PTP Current Dataset
    information"
    ::= { ptpbaseMIBGroups 2 }

ptpbaseMIBClockParentDSGroup OBJECT-GROUP
OBJECTS
    {
        ptpbaseClockParentDSParentPortIdentity,
        ptpbaseClockParentDSParentStats,
        ptpbaseClockParentDSOffset,
        ptpbaseClockParentDSClockPhChRate,
        ptpbaseClockParentDSGMCLockIdentity,
        ptpbaseClockParentDSGMCLockPriority1,
        ptpbaseClockParentDSGMCLockPriority2,
        ptpbaseClockParentDSGMCLockQualityClass,
        ptpbaseClockParentDSGMCLockQualityAccuracy,
        ptpbaseClockParentDSGMCLockQualityOffset
    }
STATUS
    current
DESCRIPTION
    "Group which aggregates objects describing PTP Parent Dataset
    information"
    ::= { ptpbaseMIBGroups 3 }

ptpbaseMIBClockDefaultDSGroup OBJECT-GROUP
OBJECTS
    {
        ptpbaseClockDefaultDSTwoStepFlag,
        ptpbaseClockDefaultDSClockIdentity,
        ptpbaseClockDefaultDSPriority1,

```

Shankarkumar et al. Expires January 30, 2013 [Page 57]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

```

        ptptimeClockDefaultDSPriority2,
        ptptimeClockDefaultDSSlaveOnly,
        ptptimeClockDefaultDSQualityClass,
        ptptimeClockDefaultDSQualityAccuracy,
        ptptimeClockDefaultDSQualityOffset
    }
STATUS      current
DESCRIPTION
    "Group which aggregates objects describing PTP Default Dataset
    information"
 ::= { ptptimeMIBGroups 4 }

ptptimeMIBClockRunningGroup OBJECT-GROUP
OBJECTS     {
    ptptimeClockRunningState,
    ptptimeClockRunningPacketsSent,
    ptptimeClockRunningPacketsReceived
}
STATUS      current
DESCRIPTION
    "Group which aggregates objects describing PTP running state
    information"
 ::= { ptptimeMIBGroups 5 }

ptptimeMIBClockTimepropertiesGroup OBJECT-GROUP
OBJECTS     {
    ptptimeClockTimePropertiesDSCurrentUTCOffsetValid,
    ptptimeClockTimePropertiesDSCurrentUTCOffset,
    ptptimeClockTimePropertiesDSLeap59,
    ptptimeClockTimePropertiesDSLeap61,
    ptptimeClockTimePropertiesDSTimeTraceable,
    ptptimeClockTimePropertiesDSFreqTraceable,
    ptptimeClockTimePropertiesDSPTPTimescale,
    ptptimeClockTimePropertiesDSSource
}
STATUS      current
DESCRIPTION
    "Group which aggregates objects describing PTP Time Properties
    information"

```

Shankarkumar et al. Expires January 30, 2013 [Page 58]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

```
 ::= { ptptimeMIBGroups 6 }
```

```

ptptimeMIBClockTransparentDSGroup OBJECT-GROUP
OBJECTS     {
    ptptimeClockTransDefaultDSClockIdentity,
    ptptimeClockTransDefaultDSNumOfPorts,
    ptptimeClockTransDefaultDSDelay,
    ptptimeClockTransDefaultDSPrimaryDomain
}
STATUS      current
DESCRIPTION
    "Group which aggregates objects describing PTP Transparent
    Dataset

```

```

information"
 ::= { ptptimeMIBGroups 7 }

ptptimeMIBClockPortGroup OBJECT-GROUP
OBJECTS
    {
        ptptimeClockPortName,
        ptptimeClockPortSyncOneStep,
        ptptimeClockPortCurrentPeerAddress,
        ptptimeClockPortNumOfAssociatedPorts,
        ptptimeClockPortCurrentPeerAddressType,
        ptptimeClockPortRole
    }
STATUS
    current
DESCRIPTION
    "Group which aggregates objects describing information for a
    given PTP Port."
 ::= { ptptimeMIBGroups 8 }

```

```

ptptimeMIBClockPortDSGroup OBJECT-GROUP
OBJECTS
    {
        ptptimeClockPortDSName,
        ptptimeClockPortDSPortIdentity,
        ptptimeClockPortDSAnnouncementInterval,
        ptptimeClockPortDSAnnounceRctTimeout,
        ptptimeClockPortDSSyncInterval,
        ptptimeClockPortDSMinDelayReqInterval,
        ptptimeClockPortDSPeerDelayReqInterval,
        ptptimeClockPortDSDelayMech,
        ptptimeClockPortDSPeerMeanPathDelay,
        ptptimeClockPortDSGrantDuration,
        ptptimeClockPortDSPTPVersion
    }
STATUS
    current
DESCRIPTION
    "Group which aggregates objects describing PTP Port Dataset
    information"
 ::= { ptptimeMIBGroups 9 }

```

```

ptptimeMIBClockPortRunningGroup OBJECT-GROUP

```

Shankarkumar et al. Expires January 30, 2013 [Page 59]

Internet-Draft draft-ietf-tictoc-ptp-mib-03.txt July 30, 2012

```

OBJECTS
    {
        ptptimeClockPortRunningName,
        ptptimeClockPortRunningState,
        ptptimeClockPortRunningRole,
        ptptimeClockPortRunningInterfaceIndex,
        ptptimeClockPortRunningTransport,
        ptptimeClockPortRunningEncapsulationType,
        ptptimeClockPortRunningTxMode,
        ptptimeClockPortRunningRxMode,
        ptptimeClockPortRunningPacketsReceived,
        ptptimeClockPortRunningPacketsSent
    }
STATUS
    current

```

```

DESCRIPTION
    "Group which aggregates objects describing PTP running interface
    information"
    ::= { ptpbaseMIBGroups 10 }

ptpbaseMIBClockPortTransDSGroup OBJECT-GROUP
    OBJECTS
        {
            ptpbaseClockPortTransDSPortIdentity,
            ptpbaseClockPortTransDSLogMinPdelayReqInt,
            ptpbaseClockPortTransDSFaultyFlag,
            ptpbaseClockPortTransDSPeerMeanPathDelay
        }
    STATUS
        current
    DESCRIPTION
        "Group which aggregates objects describing PTP TransparentDS
        Dataset
        information"
        ::= { ptpbaseMIBGroups 11 }

ptpbaseMIBClockPortAssociateGroup OBJECT-GROUP
    OBJECTS
        {
            ptpbaseClockPortAssociatePacketsSent,
            ptpbaseClockPortAssociatePacketsReceived,
            ptpbaseClockPortAssociateAddress,
            ptpbaseClockPortAssociateAddressType,
            ptpbaseClockPortAssociateInErrors,
            ptpbaseClockPortAssociateOutErrors
        }
    STATUS
        current
    DESCRIPTION
        "Group which aggregates objects describing information on peer
        PTP ports for a given PTP clock-port."
        ::= { ptpbaseMIBGroups 12 }

END

```

Shankarkumar et al. Expires January 30, 2013 [Page 60]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

5. Security Considerations

This MIB contains readable objects whose values provide information related to PTP objects. While unauthorized access to the readable objects is relatively innocuous, unauthorized access to the writeable objects could cause a denial of service, or could cause unauthorized creation and/or manipulation of tunnels. Hence, the support for SET operations in a non-secure environment without proper protection can have a negative effect on network operations.

SNMPv1 by itself is such an insecure environment. Even if the network itself is secure (for example by using IPSec), even then, there is no control as to who on the secure network is allowed to

access and SET (change/create/delete) the objects in this MIB.

It is recommended that the implementers consider the security features as provided by the SNMPv3 framework. Specifically, the use of the User-based Security Model [RFC 3414] and the View-based Access Control Model [RFC 3415] is recommended.

It is then a customer/user responsibility to ensure that the SNMP entity giving access to this MIB, is properly configured to give access to those objects only to those principals (users) that have legitimate rights to access them.

6. IANA Considerations

To be added.

7. References

7.1. Normative References

[IEEE 1588-2008] "IEEE Standard for A Precision Clock Synchronization Protocol for Networked Measurement and Control Systems", IEEE Std. 1588(TM)-2008, 24 July 2008

7.2. Informative References

[RFC 1155] Rose, M., and K. McCloghrie, "Structure and Identification of Management Information for TCP/IP-based Internets", STD 16, RFC 1155, Performance Systems International, Hughes LAN Systems, May 1990

[RFC 1157] Case, J., Fedor, M., Schoffstall, M., and J. Davin, "Simple Network Management Protocol", STD 15, RFC 1157, SNMP Research, Performance Systems International, Performance Systems International, MIT Laboratory for Computer Science, May 1990.

Shankarkumar et al. Expires January 30, 2013 [Page 61]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

[RFC 1212] Rose, M., and K. McCloghrie, "Concise MIB Definitions", STD 16, RFC 1212, Performance Systems International, Hughes LAN Systems, March 1991

[RFC 1215] M. Rose, "A Convention for Defining Traps for use with the SNMP", RFC 1215, Performance Systems International, March 1991

[RFC 1901] SNMPv2 Working Group, Case, J., McCloghrie, K., Rose, M., and S. Waldbusser, "Introduction to Community-based SNMPv2", RFC 1901, SNMP Research, Inc., Cisco Systems, Inc., Dover Beach Consulting, Inc., International Network Services, January 1996.

[RFC 1906] SNMPv2 Working Group, Case, J., McCloghrie, K., Rose, M., and S. Waldbusser, "Transport Mappings for Version 2 of the Simple Network Management Protocol (SNMPv2)", RFC 1906, SNMP Research, Inc., Cisco Systems, Inc., Dover Beach Consulting, Inc., International

Network Services, January 1996.

[RFC 2578] McCloghrie, K., Perkins, D., and J. Schoenwaelder, "Structure of Management Information Version 2 (SMIV2)", STD 58, RFC 2578, April 1999.

[RFC 2579] McCloghrie, K., Perkins, D., and J. Schoenwaelder, "Textual Conventions for SMIV2", STD 58, RFC 2579, April 1999.

[RFC 2580] McCloghrie, K., Perkins, D., and J. Schoenwaelder, "Conformance Statements for SMIV2", STD 58, RFC 2580, April 1999.

[RFC 3411] Harrington, D., Presuhn, R., and B. Wijnen, "An Architecture for Describing Simple Network Management Protocol (SNMP) Management Frameworks", STD 62, RFC 3411, Enterasys Networks, BMC Software, Inc., Lucent Technologies, December 2002

[RFC 3412] Case, J., Harrington D., Presuhn R., and B. Wijnen, "Message Processing and Dispatching for the Simple Network Management Protocol (SNMP)", STD 62, RFC 3412, SNMP Research, Inc., Enterasys Networks, BMC Software, Inc., Lucent Technologies, December 2002.

[RFC 3413] Levi, D., Meyer, P., and B. Stewart, "Simple Network Management Protocol (SNMP) Applications", STD 62, RFC 3413, Nortel Networks, Secure Computing Corporation, December 2002.

[RFC 3414] Blumenthal, U., and B. Wijnen, "User-based Security Model (USM) for version 3 of the Simple Network Management Protocol (SNMPv3)", STD 62, RFC 3414, Lucent Technologies, December 2002.

[RFC 3415] Wijnen, B., Presuhn, R., and K. McCloghrie, "View-based Access Control Model (VACM) for the Simple Network Management

Shankarkumar et al. Expires January 30, 2013

[Page 62]

Internet-Draft draft-ietf-tictoc-ptp-mib-03.txt

July 30, 2012

Protocol (SNMP)", STD 62, RFC 3415, Lucent Technologies, BMC Software, Inc., Cisco Systems, Inc., December 2002.

[RFC 3416] Presuhn, R. (Ed.), "Version 2 of the Protocol Operations for the Simple Network Management Protocol (SNMP)", STD 62, RFC 3416, BMC Software, Inc., December 2002.

[RFC 3417] Presuhn, R. (Ed.), "Transport Mappings for the Simple Network Management Protocol (SNMP)", STD 62, RFC 3417, BMC Software, Inc., December 2002.

[RFC 5905] David L. Mills, " Network Time Protocol Version 4: Protocol and Algorithms Specification", RFC 5905, University of Delaware, June 2010.

[IEEE 802.3-2008] "IEEE Standard for Information technology - Telecommunications and information exchange between systems - Local and Metropolitan area networks - Specific requirements Part 3: Carrier sense multiple access with Collision Detection (CSMA/CD)

Access Method and Physical Layer Specifications", IEEE Std. 802.3 - 2008, 26 December 2008

[G.8265.1] "Precision time protocol telecom profile for frequency synchronization", ITU-T Recommendation G.8265.1, October 2010.

8. Acknowledgements

Thanks to John Linton and Danny Lee for valuable comments.

Shankarkumar et al. Expires January 30, 2013

[Page 63]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt

July 30, 2012

9. Author's Addresses

Vinay Shankarkumar
Cisco Systems,
7025-4 Kit Creek Road,
Research Triangle Park,
NC 27560,
USA.
Email: vinays@cisco.com

Laurent Montini,
Cisco Systems,
11, rue Camille Desmoulins,
92782 Issy-les-Moulineaux,
France.
Email: lmontini@cisco.com

Tim Frost,
Symmetricom Inc.,
2300 Orchard Parkway,
San Jose,
CA 95131,

USA.
Email: tfrost@symmetricom.com

Greg Dowd,
Symmetricom Inc.,
2300 Orchard Parkway,
San Jose,
CA 95131,
USA.
Email: gdowd@symmetricom.com

Shankarkumar et al. Expires January 30, 2013 [Page 64]

Internet-Draft draft-ietf-tictoc-ntp-mib-03.txt July 30, 2012

10. ANNEX A: Extended Fields Addendum

Some structures in the MIB have been extended. The MIB is thus able to cover the structures defined in the IEEE standards and is extensible as well.

- o ClockIdentity is defined in the standard as 8-octet array. The MIB defines it as OCTET string of length (1..255).
- o ClockPortNumber is defined in the standard as ranging from 1, 2, ... till FFFF (16 bits); FFFF is used as the 'all-ports' indicator in Management messages and in signalling messages. The MIB defines it as Unsigned32 ranging in value (0..65535).
- o ClockTimeInterval is defined in the standard as of length 64 bits (Integer64). The MIB defines it as OCTET string of length (1..255).
- o ptptimeClockParentDSClockPhChRate (parentDS.observedParentClockPhaseChangeRate) is defined in the standard as 16 bits. The MIB defines it as Integer32.

